



GSM/GPRS/GPS Tracker **GL200** @Track Air Interface Protocol

Application Notes: TRACGL200AN001

Revision: 1.11



<http://www.queclink.com>
sales@queclink.com

Document Title	GL200 @Tracker Air Interface Protocol
Version	1.11
Date	2013-05-02
Status	Release
Document Control ID	TRACGL200AN001

General Notes

Queclink offers this information as a service to its customers, to support application and engineering efforts that use the products designed by Queclink. The information provided is based upon requirements specifically provided to Queclink by the customers. Queclink has not undertaken any independent search for additional relevant information, including any information that may be in the customer's possession. Furthermore, system validation of this product designed by Queclink within a larger electronic system remains the responsibility of the customer or the customer's system integrator. All specifications supplied herein are subject to change.

Copyright

This document contains proprietary technical information which is the property of Queclink Limited. The copying of this document, distribution to others, and communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of a patent grant or the registration of a utility model or design. All specification supplied herein are subject to change without notice at any time.

Copyright © Queclink Wireless Solutions Co., Ltd. 2011

Contents

Contents	2
Table Index.....	4
Figure Index	5
0. Revision history	6
1. Overview	12
1.1. Scope	12
1.2. Reference.....	12
1.3. Terms and Abbreviations	12
2. System Architecture	13
3. Message Description	14
3.1. Message Format	14
3.2. Command and Acknowledgement.....	16
3.2.1. Quick Start Setting	16
3.2.2. Bearer Setting Information	19
3.2.3. Backend Server Register Information.....	20
3.2.4. Global Configuration	21
3.2.5. Non movement detection	25
3.2.6. Time Adjustment.....	27
3.2.7. Fixed Report Information	28
3.2.8. Geo-Fence Information	32
3.2.9. Speed Alarm.....	34
3.2.10. Function Key Setting	36
3.2.11. Real Time Operation.....	38
3.2.12. White Call List Configuration	40
3.2.13. Google link SMS configuration.....	41
3.2.14. Auto unlock SIM-PIN.....	42
3.2.15. Digital Output	43
3.2.16. Digital Input Port Settings	45
3.2.17. Protocol watchdog	46
3.2.18. Safe Flight Manager.....	47
3.2.19. Data transfer between UART and backend server	49
3.2.20. Network Select.....	50
3.2.21. Outside Working Hours	51
3.2.22. Store Command String.....	53
3.2.23. User Defined Function.....	54
3.3. Report.....	56
3.3.1. Position Related Report	56
3.3.2. Device Information Report	62
3.3.3. Report for Querying.....	64
3.3.4. Event Report	75
3.3.5. Transparent Data Transmission.....	87

3.3.6. Buffer Report	89
3.3.7. Report Google Maps hyperlink.....	89
3.4. Heartbeat	91
3.5. Sever Acknowledgement.....	92
Appendix: Message Index.....	93

Table Index

TABLE 1: TERMS AND ABBREVIATIONS	12
--	----

Figure Index

FIGURE 1: SYSTEM ARCHITECTURE	13
FIGURE 2: @TRACKER PROTOCOL MESSAGES FLOW	14
FIGURE 3: WAVE SHAPE 1	43
FIGURE 4: WAVE SHAPE 2	44
FIGURE 5: WAVE SHAPE 3	44
FIGURE 6: WAVE SHAPE 4	44

0. Revision history

Revision	Date	Author	Description of change
0.02	2010-10-29	Eagle LIU	Initial
1.00	2010-10-29	Colin.HU	1. Add the parameter EPB mode in the command "AT+GTCFG" 2. Correct the range of Geo check interval in the message "+RESP:GTGCR". 3. Modify the protocol version to 1.00 4. Restore the function of distance report and mileage report. 5. Add the command "AT+GTWLT" to control whether to return a google link SMS to the incoming call.
	2010-11-4	Colin HU	1. Add the command "AT+GTGLM" to control whether to send a SMS with google link to some specified number for SOS and GEO event. 2. Modify the definition of mode in the command ""AT+GTNMD to allow to report the message "+RESP:GTNMR" from rest to motion and adjust the fix interval and send interval for FRI when the state of GL200 change from motion to rest. 3. Add battery percentage in the report message "+RESP:GTINF", "+RESP:GTBAT" and position related message
	2010-11-5	Colin.HU	Add the command "AT+GTPIN" for how to unlock SIM-PN automatically.
1.01	2011-01-13	Colin.HU	1. Add the movement detection function in the command AT+GTFRI. 2. Modify the minimum value of the fix interval in the commands

			<p>AT+GTFRI and AT+GTNMD to 5 seconds.</p> <p>3. Modify the minimum value of distance and mileage in the command AT+GTFRI to 50 meters.</p>
1.02	2011-01-28	Colin.HU	1. Add the command AT+GTOUT and AT+GTDIS for the digital output and input application.
	2011-03-08	Colin.HU	<p>1. Add the command AT+GTDOG to realize protocol watchdog reboot.</p> <p>2. Separate the ignition state report to independent messages +RESP:GTIGN and +RESP:GTIGF.</p>
1.03	2011-03-22	Steven.Liu	Add a new parameter <Gsm report> in the command AT+GTCFG to control whether to report cells' information after failed to get GPS position.
	2011-04-02	Wokky.Lin	Add two new parameters <ODO enable> and <ODO mileage> in the command AT+GTCFG to calculate the total mileage.
	2011-04-14	Wokky.Lin	<p>1. Add the command AT+GTDAT to realize the data transferring between UART and the backend server.</p> <p>2. Add the Optimum Report mode in the command AT+GTFRI.</p>
	2011-04-20	Wokky.Lin	1. Add the expiry function in the command AT+GTCFG.
1.04	2011-06-16	Wokky.Lin	1. Add new parameters <full power up> in the command AT+GTFKS to indicate whether the terminal powers on completely after the terminal was power on because of charger inserted.
	2011-06-20	Colin.HU	1. Add a new value for the parameter <Gsm report> to disable cells' information report if no cell's information is found.

	2011-07-06	Colin.HU	<p>1. Correct the description of the command AT+GTRTO.</p> <p>2. Correct URAT to UART in the title of the chapter 3.2.18.</p>
1.05	2011-07-22	Colin.HU	<p>1. Add the parameter <i><Agps mode></i> to configure the AGPS function. Please refer to the chapter 3.2.4 and 3.3.3.</p> <p>2. Modify the parameter <i><reserved1></i> or <i><reserved></i> after <i><Cell ID></i> to <i><Odo mileage></i> in each position related message. Please refer to the chapter 3.3.1 and 3.3.4.</p>
	2011-08-09	Wokky.Lin	<p>1. Add two new parameters <i><rest unit></i> and <i><motion unit></i> in the command AT+GTNMD to set the EBK motion sensor.</p>
	2011-08-23	Colin.HU	<p>1. Modify the parameters <i><rest unit></i> and <i><motion unit></i> to <i><pm rest threshold></i> and <i><pm motion threshold></i>.</p> <p>2. Modify the range of threshold to (2 – 9) in the command AT+GTNMD.</p> <p>3. Modify the range of movement duration to (1 – 50).</p> <p>4. Add a parameter <i><corner></i> into command AT+GTFRI for turning detection.</p>
	2011-08-26	Colin.HU	<p>Add notice specification for scheduled distance report, scheduled mileage report, optimum report and turning detection.</p>
	2011-09-01	Colin.HU	<p>1. Complete the description for the parameter <i><LED on></i> in the command AT+GTCFG.</p> <p>2. Modify the BUFFER size.</p>
1.06	2011-11-04	Wokky.Lin	<p>Add the 2 to the mode of DIS to disable/enable the sleep mode.</p>
	2011-11-28	Wokky.Lin	<p>Add a parameter <i><state mode></i> into command AT+GTGEO for reporting state when changes.</p>

	2011-11-28	Wokky.Lin	Add a parameter <Urc report> into command AT+GTNMD for outputting sensor's state to UART.
	2011-11-29	Wokky.Lin	Add the mode 2 to the buffer mode for high priority.
	2011-12-07	Wokky.Lin	Add a parameter <flash type> into the device Information Report.
1.07	2012-02-09	Wokky.Lin	Change and add mode 2 to power key mode.
1.08	2012-02-14	Wokky.Lin	Add unit mode to AT+GTDOG command and modify the description of power key function in GTFKS command.
	2012-03-19	Wokky.Lin	Change the "unit mode" to "unit".
	2012-03-19	Wokky.Lin	Delete the description of Emergency mode .
	2012-03-19	Wokky.Lin	Add a new RTO command "GSV", and add the new report GTGSV to get the fix level.
1.09	2012-04-18	Wokky.Lin	Add two parameters gsm interval and pdp interval to AT+GTDOG command to set the reboot interval when no GSM signal and GPRS failure always.
1.10	2012-5-18	Bart.Yuan	1. Add a new event +RESP:GTIGL realize reporting when ignition on and igniton off .
	2012-07-04	Wokky.Lin	1. Add the new command AT+GTNTS to set the current network to other when in low signal. 2. Add the mode 5 to the mode parameter in AT+GTFRI command. 3. Add a new RTO command "GSM" to report the cells' information. 4. Add the mode 3 to the Gsm report parameter in AT+GTCFG command. 5. Add the mode 3 to the Gps on need parameter in AT+GTCFG command.

			<p>6. Add a parameter <Need Ack> to AT+GTDAT command.</p> <p>7. Add a parameter <Sleep enable> to AT+GTCFG command.</p>
	2012-07-25	Wokky.Lin	Modify the names of parameter <Check interval1>, <Send interval1>, <Check interval2> and <Send interval2> in AT+GTFRI command and +RESP: GTALL.
	2012-07-26	Wokky.Lin	<p>1. Modify the description of the parameter <mode> in AT+GTNMD command.</p> <p>2. Modify the description of the parameter <mode> in AT+GTDIS command: add the mode 3.</p> <p>3. Modify the description of the parameter <send interval> in AT+GTSPD command: change the range.</p> <p>4. Change the length of parameter <device name> to 20.</p>
	2012-08-02	Colin.Hu	Modify the range of the parameter <corner> in the command AT+GTFRI to 0 – 180.
	2012-8-21	Bart.Yuan	1.Distinguish ignition on and ignition off in + RESP:GTIGL
	2012-8-27	Colin.Hu	Modify the minimum value of heart beat interval to 5 minutes in the command AT+GTQSS and AT+GTSRI.
1.11	2012-9-5	Bart.Yuan	Add command AT+GTOWH to protect the privacy of the driver when they are off duty.
	2012-11-26	Wokky.Lin	Add a parameter <GSM Interval> to AT+GTNTS command.
	2013-01-21	Evan.Tu	<p>1.Add a parameter <Lock state> in the report message +RESP:GTINF</p> <p>2.Add the report message +RESP:GTINF</p>
	2013-01-21	Colin.Hu	Add the description for the report message + RESP:GTDAT .

	2013-02-04	April.Chen	1.Add the description for the commands “AT+GTCMD” and “AT+GTUDF”.
	2013-2-18	Evan.Tu	1 Add the new report type for the message “+RESP:GTDOG”

1. Overview

1.1. Scope

The @Track Air Interface Protocol is a digital communication interface based on printable ASCII characters over SMS or GPRS which is used for all communication between the backend server and the terminal. The backend server sends a command to the terminal and then the terminal confirms with an acknowledgement message. If necessary, the terminal also sends report messages to the backend server.

The purpose of this document is to describe how to build up the backend server based on the @Track Air Interface Protocol.

1.2. Reference

Table 1: Reference

SN	Document name	Remark
[1]	GL200 External Battery Kit User Manual	

1.3. Terms and Abbreviations

Table 2: Terms and abbreviations

Abbreviation	Description
APN	Access Point Network
ASCII	American National Standard Code for Information Interchange
GPRS	General Packet Radio Service
GSM	Global System for Mobile Communications
HDOP	Horizontal Dilution of Precision
ICCID	Integrated Circuit Card Identity
IP	Internet Protocol
SMS	Short Message Service
TCP	Transmission Control Protocol
UDP	User Datagram Protocol
UTC	Coordinated Universal Time

2. System Architecture

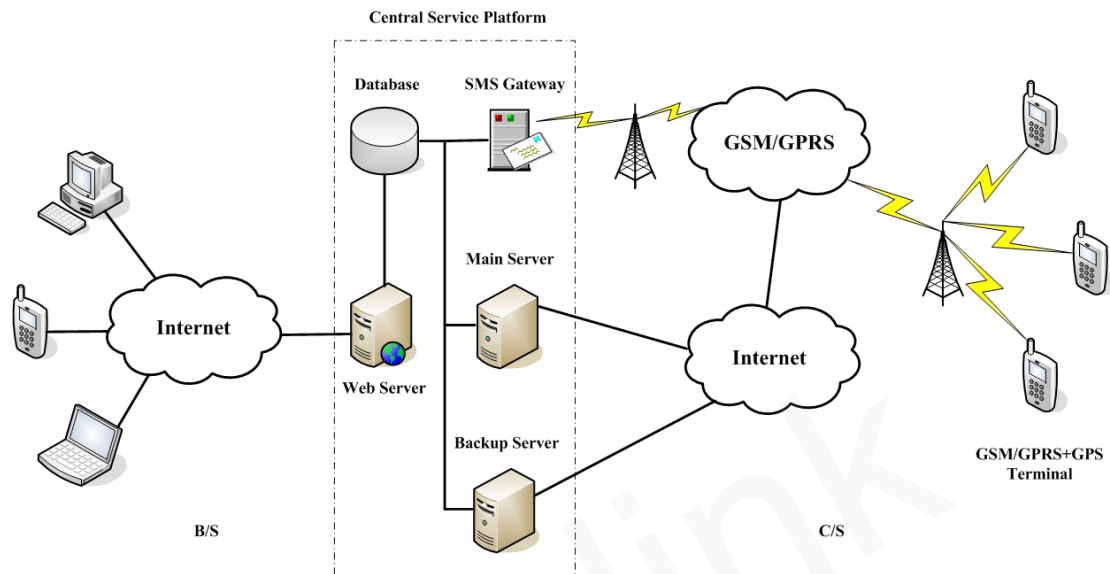


Figure 1: System architecture

The backend server can be accessed by many terminals and should have the following abilities:

- ✧ The backend server should be able to access the internet and listen to the connection originating from the terminal.
- ✧ The backend server should be able to support a TCP or UDP connection with the terminal. It should be able to receive data from the terminal and send data to the terminal.
- ✧ The backend server should be able to receive and send SMS.

3. Message Description

3.1. Message Format

All of the @Track Air Interface Protocol messages are composed of printable ASCII characters. Each message has the following format:

Message format	Message type
AT+GTXXX=<parameter1>,<parameter2>,...\$	Command
+ACK:GTXXX,<parameter1>,<parameter2>,...\$	Acknowledgement
+RESP:GTXXX,<parameter1>,<parameter2>,...\$	Report

The entire message string ends with character '\$'.

The characters 'XXX' identify the deferent message.

The "<parameter1>,<parameter2>,..." carry the message's parameters. The number of parameters is different in different messages. The ASCII character ',' is used to separate the neighbouring parameter characters. The parameter string may contain the ASCII characters: '0'-'9', 'a'-'z', 'A'-'Z'.

Detailed descriptions of each message format are located in the specific message sections.

By sending Commands to the terminal, the backend server can either configure and query the parameters of the terminal or control the terminal to perform specific actions. When the terminal receives Commands over the air, it will reply with a corresponding Acknowledgement message. According to the configuration of the parameters, the terminal can send Report messages to the backend server. Please see the following figure:

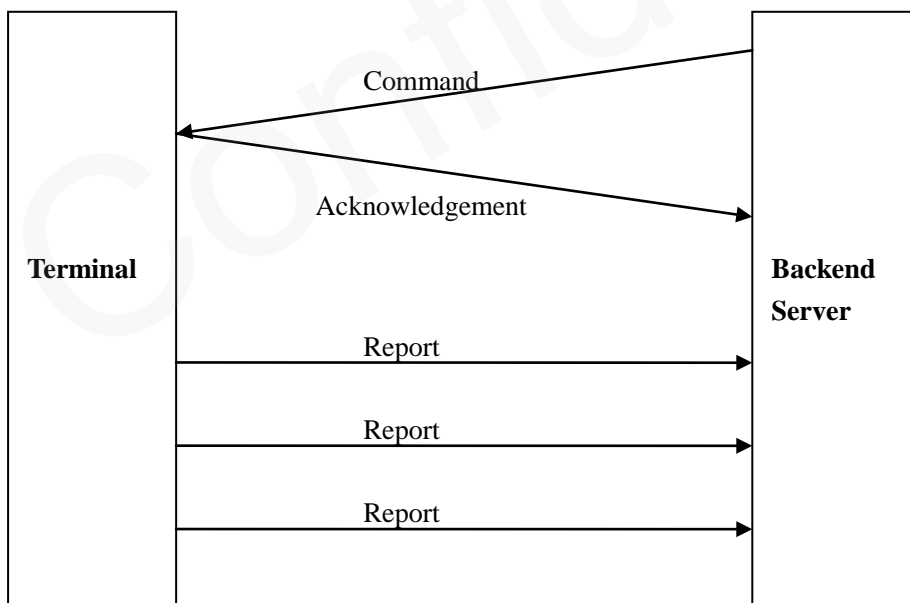


Figure 2: @Tracker protocol messages flow

When the device receives commands over the air, it supports several commands in one SMS or GPRS packet without separate symbol between two close commands. But it is necessary to make sure the total size of the several commands is not longer than 160 if the commands are sent via SMS. Here is an example to send three commands in one SMS.

```
AT+GTFRI=gl200,1,1,,,0000,2359,60,60,,,1F,0,,,,,,,,,0007$AT+GTGEO=gl200,0,3,101.412248,21.187891,1000,600,,,,,,,,,0008$AT+GTSPD=gl200,1,5,40,30,60,,,,,,,,,0009$
```

It includes three commands (**AT+GTFRI**, **AT+GTGEO** and **AT+GTSPD**) in the above message. And the terminal will handle the three commands one by one after it received the message via SMS and it will report the following three acknowledgement message to the backend server one by one.

```
+ACK:GTFRI,02010B,135790246811220,,0007,20100310172830,11F0$
```

```
+ACK:GTGEO,02010B,135790246811220,,0,0008,20100310172900,11F1$
```

```
+ACK:GTSPD,02010B,135790246811220,,0009,20100310172930,11F2$
```


3.2. Command and Acknowledgement

3.2.1. Quick Start Setting

The command **AT+GTQSS** is used to set the GPRS parameter and backend server information in one command if all these settings are within 160 bytes, otherwise use **AT+GTBSI** and **AT+GTSRI** in two steps.

➤ **AT+GTQSS=**

Example:

AT+GTQSS=gl200,cmnet,,,4,,,116.226.44.17,9001,116.226.44.16,9002,+8613812341234,0,1,,0001\$

Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
APN	<=40		
APN user name	<=30		
APN password	<=30		
Report mode	1	0 – 5	0
Reserved	0		0
Buffer enable	1	0 1 2	1
Main server IP/domain name	<=60		
Main server port	<=5	0 – 65535	0
Backup server IP	<=15		0.0.0.0
Backup server port	<=5	0 – 65535	0
SMS gateway	<=20		
Heartbeat interval	<=3	0 5 – 360min	0
SACK enable	1	0 1	0
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <Password>: The valid character of password is '0'-'9', 'a'-'z', 'A'-'Z'. The default value is "gl200".
- ✧ <APN>: Access point name (APN).
- ✧ <APN user name>: the GPRS APN user name. If the parameter field is empty, the parameter will be cleared.
- ✧ <APN password>: the GPRS APN password. If the parameter field is empty, the parameter will be cleared.
- ✧ <Report mode>: Supports report modes as following:
 - 0: Stop reporting.
 - 1: TCP short-connect preferred mode. The connection is based on TCP protocol. The

terminal connects to the backend server every time it needs to send data and will shut down the connection when the terminal finishes sending data. And if it is failed to establish a TCP connection with the backend server (including Main Server and Backup Server), it will try to send data via SMS.

2: TCP short-connect forced mode. The connection is based on TCP protocol. The terminal connects to the backend server every time it needs to send data and will shut down the connection when the terminal finishes sending data. And if it is failed to establish a TCP connection with the backend server (including Main Server and Backup Server), it will be stored in the BUFFER (if BUFFER function is enabled, please refer to *<Buffer enable>*) or discarded (if the BUFFER function is disabled).

3: TCP long-connect mode. The connection is based on TCP protocol. The terminal connects to the backend server and maintains the connection using the heart beat data. Please note that in this mode the backend server should respond to the heart beat data from the terminals.

4. UDP mode. The terminal will send data to the backend server by UDP protocol. It supports to receive protocol command via UDP. But it is recommended to make sure the IP address and UDP port of the device can be visited in the internet, and this is generally realized by heart beat package and the message **+RESP:GTPDP**.

5: Force on SMS. Only use the SMS for transmitting.

- ✧ *<Reserved>*: Not used at present. Please keep empty.
- ✧ *<Buffer enable>*: Enable or disable BUFFER function. Please refer to 3.3.5 for the details about BUFFER function.
 - 0 Disable the BUFFER function.
 - 1 Enable the BUFFER function.
 - 2 High priority. Enable the buffer report function. Under this working mode, the device will send all the buffered messages before sending any normal message except for the SOS message (**+RESP:GTSOS**).
- ✧ *<Main server IP/domain name>*: The IP address or the domain name of the main server.
- ✧ *<Main server port>*: The port of the main server.
- ✧ *<Backup server IP>*: The IP address of the backup backend server.
- ✧ *<Backup server port>*: The port of the backup server.
- ✧ *<SMS gateway>*: Maximum 20 characters including the optional national code starting with “+” for SMS messages. Short code (for example: 10086) is also supported.
- ✧ *<Heartbeat interval>*: the interval for the terminal to send heartbeat package message to the backend server. If set to 0, no heartbeat package is sent.
- ✧ *<SACK enable>*: A numeric to indicate whether the backend server should reply SACK message to the device.
 - 0: the backend server does not reply SACK message after receiving a message from the device.
 - 1: the backend server should reply SACK message after receiving a message from the device.
- ✧ *<Serial number>*: the serial number for the command. It will be invoked in the ACK message of the command.
- ✧ *<Tail character>*: a character to indicate the end of the command. And it should be “\$”.

Note:

If *<Report mode>* is set as 4 (UDP mode), it is strongly recommended to enable SACK or heart beat mechanism (*<Heartbeat interval>* doesn't equal to 0).

The acknowledgement message of AT+GTQSS command:

➤ +ACK:GTQSS

Example:

+ACK:GTQSS,02010B,135790246811220,,0001,20100310172830,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ *<Protocol version>*: The combination of the device type and the version number of the applied protocol. The first two characters 'XX' indicate the device type. '02' represents GL200. The middle two characters are the main version number and the last two characters are the minimum version number. Both the main version and the minimum version are hex digital. For example, '020A' means version 2.10.
- ✧ *<Unique ID>*: ID of the device, use the IMEI of the current SIM card inside the terminal.
- ✧ *<Device name>*: Please refer to the parameter *<Device name>* in the command **AT+GTCFG**.
- ✧ *<Serial number>*: The same serial number which is sent to the device with the corresponding command. The backend server could use it to distinguish which command the ACK message is for.
- ✧ *<Send time>*: The local time to send the ACK message.
- ✧ *<Count number>*: The self-increasing count number will be put into every acknowledgment message and report message. The count is beginning from 0000 and increases by 1 every time. It will roll back after "FFFF".

3.2.2. Bearer Setting Information

The command **AT+GTBSI** is used to set the GPRS parameter.

➤ **AT+GTBSI=**

Example: AT+GTBSI=gl200,cmnet,,,,,,,,,0002\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
APN	<=40		
APN user name	<=30		
APN password	<=30		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

The acknowledgement message of **AT+GTBSI** command:

➤ **+ACK:GTBSI**

Example: +ACK:GTBSI,02010B,135790246811220,,0002,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.3. Backend Server Register Information

The command **AT+GTSRI** is used to configure the backend server information that the terminal reports to and the report mode that defines the communication method between the backend server and the terminal.

➤ **AT+GTSRI=**

Example: AT+GTSRI=gl200,4,,116.226.44.17,9001,116.226.44.16,9002,+8613812341234,0,1,,,,,0003\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Report mode	1	0 – 5	0
Reserved	0		0
Buffer enable	1	0 1 2	1
Main server IP/domain name	<=60		
Main server port	<=5	0 – 65535	0
Backup server IP	<=15		0.0.0.0
Backup server port	<=5	0 – 65535	0
SMS gateway	<=20		
Heartbeat interval	<=3	0 5 – 360min	0
SACK enable	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

The acknowledgement message of **AT+GTSRI** command:

➤ **+ACK:GTSRI**

Example: +ACK:GTSRI,02010B,135790246811220,,0003,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.4. Global Configuration

The AT+GTCFG command is used to configure the global parameters.

➤ AT+GTCFG=

Example:

AT+GTCFG=quectl,123456,,,,,,,,,,,,,,,,,,,,,0004\$

AT+GTCFG=gl200,,GL200,0,0,0,0,7,0,0,,,,1,1,300,1,0,20491231235959,1,0,,0004\$

Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
New password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	
Device name	20	'0' – '9', 'a' – 'z', 'A' – 'Z', '-', '_'	GL200
ODO enable	1	0 1	0
ODO mileage	<=9	0.0 – 4294967.0Km	0
GPS on need	1	0 1 2 3	1
GPS fix delay	2	5 – 60sec	5
Report items mask	<=4	0000 – FFFF	001F
Gsm report	1	0 1 2 3	0
Reserved	0		
Event mask	4	0000-FFFF	0FFF
EPB mode	1	0 1	0
LED on	1	0 1 2	1
Info report enable	1	0 1	1
Info report interval	<=5	30 – 86400sec	300
Location by call	1	0 1	1
Expiry enable	1	0 1	0
Expiry time	14	YYYYMMDDHHMMSS	
Agps mode	1	0 1	0
Sleep enable	1	0 1	0
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <New password>: Set to change the current password.
- ✧ <Device name>: the name of the device, which appears in each uplink message.
- ✧ <ODO enable>: Enable or disable the odograph function to calculate the total mileage. The current mileage is included in the message GTINF.
 - 0: Disable the ODO mileage function.
 - 1: Enable the ODO mileage function.
- ✧ <ODO mileage>: The value of the current total mileage.
- ✧ <GPS on need>: Whether to close GPS chip after retrieving GPS position information.
 - 0: Never close GPS chip

- 1: Close GPS chip after retrieving GPS information every time.
 - 2: Never close GPS chip only in ignition on state or movement state.
 - 3: Never open GPS chip.
- ✧ *<GPS fix delay>*: This is the time to wait after GPS fixing succeed. After GPS fixing succeed, the device will wait for a period of time (defined by *<GPS fix delay>*) and then get the result of GPS fixing because maybe it is not accurate to get the position immediately after GPS fixing succeed. (e.g. if *<GPS fix delay>* is set as 7, we will wait for 7 seconds after GPS fixing succeed and then get the position as the result). The range of the parameter is 5 – 60, and the default value is 5. Unit: second.
- ✧ *<Report items mask>*: Bitwise report mask to configure the composition of all the uplink message. Each bit represents a field in the uplink message. If some bit is set as 1, the corresponding field will be filled if it is included in the uplink message. Otherwise, the field will be empty.
- Bit0(0001): *<speed>*
 - Bit1(0002): *<azimuth>*
 - Bit2(0004): *<altitude>*
 - Bit3(0008): GSM LAI and CI, including *<mcc>*, *<mnc>*, *<lac>*, *<cellid>*
 - Bit4(0010): *<send time>*
 - Bit5(0020): *<Device name>*
- ✧ *<Event mask>*: A Hex value to configure which event reports can be sent to the backend server: Each bit corresponds to a report message. And if the bit is set as 1, the corresponding report message can be sent to the backend server. Otherwise, it can not be sent to the backend server. Here is the mapping between each bit and each report message.
- bit0(0001): **+RESP:GTPNA**
 - bit1(0002): **+RESP:GTPFA**
 - bit2(0004): **+RESP:GTEPN**
 - bit3(0008): **+RESP:GTEPF**
 - bit4(0010): Reserved
 - bit5(0020): **+RESP:GTBPL**
 - Bit6(0040): **+RESP:GTBTC**
 - Bit7(0080): **+RESP:GTSTC**
 - bit8(0100): **+RESP:GTSTT**
 - bit9(0200): **+RESP:GTANT**
 - bit10(0400): **+RESP:GTPDP**
 - bit11(0800): **+RESP:GTPNL**
 - bit12(1000): **+RESP:GTIGN** and **+RESP:GTIGF**
 - bit13(2000): **+RESP:GTIGL**
- ✧ *<Gsm report>*: If GPS fixing for the report message **+RESP:GTSOS**, **+RESP:GTRTL**, **+RESP:GTLBC** and **+RESP:GTFRI** were failed and the parameter *<Gsm report>* was set as 1, the terminal reports the message **+RESP:GTGSM**, including the information of the service cell and the neighbour cells after those messages.
- 0: Not allow the cells' information report after failed to get GPS position.
 - 1: Allow the cells' information report after failed to get GPS position.
 - 2: Do not report the message **+RESP:GTGSM** if no cell's information is found.

- 3: Allow the cells' information report whatever it gets GPS position or not
- ✧ *<EPB mode>*: The mode of External Power Control Unit With Built-in Motion Sensor.
 - 0: disable External Power Control Unit With Built-in Motion Sensor.
 - 1: enable External Power Control Unit With Built-in Motion Sensor.
 - ✧ *<LED on>*: Configure the working mode of LEDs.
 - 0: Each time after the device powers on or the parameter is updated to 0 from other values, GPS LED will work for 150 seconds and then turn off deadly. GSM LED and Power LED work normally.
 - 1: All LEDs work normally.
 - 2: All LEDs are off always except the following cases. The first exception is all LEDs will work for a period time after power on. The second exception is Power LED will flash fast during power off procedure. The third exception is Power LED will work normally for charging status when a charger is inserted in power off state.
 - ✧ *<Info report enable>*: Enable/disable the device information report (+RESP:GTINF) function. The device information include state of the device, ICCID, GSM signal strength, adapter connection status, battery voltage, charging status, Power and GPS LED working mode, GPS on need setting, GPS antenna type, GPS antenna status, the last known time of GPS fix.
 - 0: Disable the device information report function.
 - 1: Enable the device information report function.
 - ✧ *<Info report interval>*: The interval of reporting the device information.
 - ✧ *<Location by call>*: Configure how to handle the incoming call.
 - 0: Just hang up the call.
 - 1: Hang up the call and report the current position.
 - ✧ *<Expiry enable >*: Enable or disable the expiry function to stop all the GPS fixing and any reports.
 - 0: Disable the Expiry function.
 - 1: Enable the Expiry function.
 - ✧ *<Expiry time>*: The time when to stop all the GPS fixing and any reports. The valid format is "YYYYMMDDHHMMSS". The value range of "YYYY" is "2000"-"3000". The value range of "MM" is "01"-"12". The value range of "DD" is "00"-"31". The value range of "HH" is "00"-"23". The value range of "MM" is "00"-"59". The value range of "SS" is "00"-"59". It is noticed to use RTC time here.
 - ✧ *<Agps mode>*: A numeric to indicate whether to enable AGPS. AGPS is helpful to improve the ratio to get GPS position successfully and reduce the time to get GPS position.
 - 0: Disable the AGPS function.
 - 1: Enable the AGPS function.
 - ✧ *<Sleep enable >*: Enable or disable the sleep mode when charging.
 - 0: Disable the sleep mode when charging.
 - 1: Do not disable the sleep mode when charging.

Note:

For AGPS function, it is necessary to download AGPS file from the specified URL, so it is unavoidable to cost some data traffic for the AGPS function. At present, it takes about 10

KB data traffic for the AGPS function each day.

The acknowledgement message of **AT+GTCFG** command:

➤ **+ACK:GTCFG**

Example: +ACK:GTCFG,02010B,135790246811220,,0004,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, $X \in \{'A'-'Z', '0'-'9'\}$	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.5. Non movement detection

The AT+GTNMD command is used to configure the parameters for non movement detection.

➤ AT+GTNMD=

Example: AT+GTNMD=gl200,,3,2,3,,,,,,,,,0005\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
mode	1	0-F	0
Non-movement duration	<=3	1 – 255(×15sec)	2
Movement duration	<=2	1 – 50(×128ms)	3
Movement threshold	1	2 – 9	2
rest fix interval	5	5 – 86400sec	300
rest send interval	5	5 – 86400sec	300
pm rest threshold	1	2 – 9	2
pm motion threshold	1	2 – 9	3
Urc report	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ <mode>: A hex numeric to determine how the function works. Each bit of the hex numeric indicate different behavior that device could do. If the corresponding bit is 1, the device will behave as the description. Otherwise, it won't behave as the description.

Bit0(1): Suspend the report of FRI(including +RESP:GTGSM for FRI) and Geo-Fence when it detects non-movement.

Bit1(2): Report the message +RESP:GTNMR to the backend server when it detects non-movement.

Bit2(4): Report the message +RESP:GTNMR to the backend server when it detects movement.

Bit3(8): Change the fix interval and send interval of FRI(including +RESP:GTGSM for FRI) to <rest fix interval> and <rest send interval> when it detects non-movement. In the case, it just modify the fix interval and send interval of FRI(including +RESP:GTGSM for FRI) but not suspend the report of FRI(including +RESP:GTGSM for FRI) even if Bit0 is 1.

✧ <Non-movement duration>: A time parameter to determine whether the device enters non-movement status, i.e. if the motion sensor detects that the device keeps in non-movement for a period of time defined by <Non-movement duration>, the device will be considered as in non-movement status.

✧ <Movement duration>: A time parameter to determine whether the device enters movement

status. If the motion sensor detects that the device keeps in movement for a period of time defined by *<Movement duration>*, the device will be considered as in movement status.

- ✧ *<Movement threshold>*: The threshold for the motion sensor to determine whether the device is in movement. The less, the more likely to be treated as movement.
- ✧ *<rest fix interval>*: the fix interval for the report of FRI when the device is in rest state if Bit3 of *<mode>* is 1.
- ✧ *<rest send interval>*: the send interval for the report of FRI when the device is in rest state if Bit3 of *<mode>* is 1.
- ✧ *<pm rest threshold>*: The threshold for the EBK motion sensor to determine whether the EBK enters non-movement status.
- ✧ *<pm motion threshold>*: The threshold for the EBK motion sensor to determine whether the EBK enters movement status.
- ✧ *<Urc report>*: Enable or disable output sensor state through urc.

0: Do not output the sensor's state to UART.

1: Output a URC to UART to indicate state changing. "SENSOR:REST" means state changing from MOTION to REST. "SENSOR:MOTION" means state changing from REST to MOTION.

The acknowledgement message of **AT+GTNMD** command:

➤ **+ACK:GTNMD**

Example:			
+ACK:GTNMD,02010B,135790246811220,,0005,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.6. Time Adjustment

The command **AT+GTTMA** is used to adjust local time. If the GPS fixing is successful, the local time will be automatically adjusted according to the GPS UTC time.

➤ AT+GTTMA=

Example:			
AT+GTTMA=gl200,-,3,30,0,20090917203500,,,,,0006\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Sign	1	+ -	+
Hour Offset	<=2	0 - 23	00
Minute Offset	<=2	0 - 59	00
Daylight Saving	1	0 1	0
UTC Time	14	YYYYMMDDHHMMSS	
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <Sign>: Indicate the positive or negative of the local time offset to UTC
- ✧ <Hour Offset>: UTC offset in hours
- ✧ <Minute Offset>: UTC offset in minutes
- ✧ <Daylight Saving>: Enable/disable daylight saving time.
0: Disable daylight saving
1: Enable daylight saving
- ✧ <UTC time>: The configuration UTC time.

The acknowledgement message of **AT+GTTMA** command:

➤ +ACK:GTTMA

Example:			
+ACK:GTTMA,02010B,135790246811220,,0007,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	

Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.7. Fixed Report Information

The command **AT+GTFRI** is used to configure the parameters of scheduled report.

➤ **AT+GTFRI=**

Example:			
AT+GTFRI=gl200,0,,,,,,,,,,,,,0007\$			
AT+GTFRI=gl200,1,1,,,0000,2359,60,60,,,1F,,,,,0007\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Mode	1	0 1 2 3 4 5	0
Discard no fix	1	0 1	1
Reserved	0		
Reserved	0		
Begin time	4	HHMM	0000
End time	4	HHMM	0000
Check interval	<=5	5 – 86400sec	180
Send interval	<=5	5 – 86400sec	180
Ignition check interval	<=5	5 – 86400sec	180
Ignition send interval	<=5	5 – 86400sec	180
Report mask	<=4	0000 – FFFF	001F
Distance	<=5	50 – 65535m	1000
Mileage	<=5	50 – 65535m	1000
movement detect mode	1	0 1	0
movement speed	<=3	1-999(km/h)	5
movement distance	<=4	1-9999(m)	50
Movement send number	1	1-5	5
corner	3	0 - 180	0
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ *<Mode>*:

0: Disable fixed report function.

1: Enable the scheduled timing report.

2: Enable the scheduled distance report. Report each time the straight length that the device moved has exceeded the specified distance. It ignores the detail path the device has passed along. This function is invalid unless the GPS chip opens always. Unit: Meter.

3: Enable the scheduled mileage report. Report each time the path length that the device moved has exceeded the specified length. It calculates the length of the detail path the device

has passed along. This function is invalid unless the GPS chip opens always. Unit: Meter.

4: Optimum Report. Simultaneously observe time interval and path length between two adjacent reports. Report device position if the calculated time interval per current time against the last report time is greater than the <Send Interval>, and the length of path between the current position and the last position is greater than the <Mileage> setting. There is a precondition for the function. It is that <GPS on need> must be 0 (Never close GPS chip) or 2 (Never close GPS chip in ignition on state or movement state).

5: Enable the scheduled timing report for GSM.

- ✧ <Discard no fix>: 0 to report last known GPS position if there is no GPS fix, 1 to send nothing if there is no GPS fix.
- ✧ <Begin time>: The start time of scheduled fixed report. The valid format is “HHMM”. The value range of “HH” is “00”-“23”. The value range of “MM” is “00”-“59”. It is noticed to use RTC time here.
- ✧ <End time>: The end time of scheduled fixed report. The valid format and range are same as <Begin time>.
- ✧ <Check interval>: The interval time to fix GPS when the device attached vehicle is ignition off, its value range is 5-86400 and the unit is second.
- ✧ <Send interval>: The period to send the position information when the device attached vehicle is ignition off. The value range is 5-86400 and the unit is second.
- ✧ <Ignition check interval>: The interval time to fix GPS when the device attached vehicle is ignition on, its value range is 5-86400 and the unit is second.
- ✧ <Ignition send interval>: The period to send the position information when the device attached vehicle is ignition on. The value range is 5-86400 and the unit is second.
- ✧ <Report mask>: Bitwise report mask to configure the composition of GPS position information for fixed report. If some bit is set as 1, the corresponding field will be filled in the position related message. Otherwise, the field will be empty.

Bit0(0001): <speed>

Bit1(0002): <azimuth>

Bit2(0004): <altitude>

Bit3(0008): GSM LAI and CI, including <mcc>, <mnc>, <lac>, <cellid>

Bit4(0010): <send time>

- ✧ <Distance>: the specified distance to send the position information when <Mode> is 2 and this is valid only in the case that GPS chip keep opened always. Unit: meter.
- ✧ <Mileage>: the specified path length to send the position information when <Mode> is 3 and this is valid only in the case that GPS chip keep opened always.. Unit: meter.
- ✧ <movement detect mode>: Enable or disable the movement detect function.

0: Disable the movement detect function.

1: Enable the movement detect function. If the movement detect function is enabled, it will consider the device is non-movement if the speed according to the GPS fixing result is slower than <movement speed> and the distance between the current GPS point and the last moving GPS point is less than <movement distance>. After it considers the device is non-movement, it will stop reporting FRI message after report FRI messages (speed field is shown as -1 in these messages.) for <movement send number> times.

- ✧ <movement speed>: The speed threshold of movement detect. The unit is km/h.

- ✧ *<movement distance>*: The distance threshold of movement detect. The unit is meter.
- ✧ *<movement send number>*: According to the speed threshold and distance threshold, if the terminal is considered staying at one position, the terminal will send out at most this number of reports before it moves again.
- ✧ *<corner>*: A numeric to indicate whether to report +RESP:GTFRI message according to the heading changing, i.e. the movement direction of the device changing.
 0: disable the function, i.e. do not detect whether the device has changed its direction.
 40 – 100: The angle used for deciding whether the device turn around. If the heading changing is greater than the specified value, the device will be considered turning around.
 Unit: degree.

Note:

✧ **Check and send interval**

If *<GPS On Need>* was set as 1 or *<GPS On Need>* was set as 2 without ignition on or movement,

The terminal has two modes to operate the GPS module according to the value of *<Check interval>*:

- **Normal mode:** If the *<Check interval>* is more than 60 seconds, the terminal will close the GPS part every time after GPS fixing finishes in order to save power.
- **Emergent mode:** If *<Check interval>* is less than 60 seconds, the terminal will keep GPS on always in active time.

Due to the maximum length limitation of the report message, it must be assured that: *<Send interval>* / *<Check Interval>* ≤ 15. If exceed that limitation, the command is discarded and the previous settings keep untouched.

If the terminal is in “Force on SMS Mode” (*<Report mode>* = 5) while the *<Send interval>* / *<Check Interval>* > 1, the terminal will report only the last position in the fixed timing report, because only one position could be filled in one single SMS message (160 bytes at most).

✧ **Action time range**

- *<Begin time>* < *<End time>*: reports in the time period (begin time, end time) every day.
- *<Begin time>* > *<End time>*: reports starting from *<Begin time>* and stopping at *<End time>* on the following day.
- *<Begin time>* = *<End time>*: reports on the whole day.

✧ **Scheduled Report Mode**

For the mode schedule distance report and scheduled mileage report and optimum report, *<GPS on need>* must be 0 (Never close GPS chip) or 2 (Never close GPS chip in ignition on state or movement state) for the function. For the mode scheduled timing report, it doesn't care whether GPS works always.

✧ **Corner report**

It is necessary to set *<GPS on need>* as 0 or 2 for detecting turning point. Because the

detection for turning point is based on heading in GPS position which is not so accurate, it could make mistake to detect turning point sometimes.

The acknowledgement message of **AT+GTFRI** command:

➤ **+ACK:GTFRI,**

Example:			
+ACK:GTFRI,02010B,135790246811220,,0007,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.8. Geo-Fence Information

The command **AT+GTGEO** is used to configure the parameters of Geo-Fence. Geo-Fence is a virtual perimeter on a geographic area using a location-based service, so that when the geofencing terminal enters or exits the area a notification is generated. The notification can contain information about the location of the terminal and may be sent to the backend server.

➤ **AT+GTGEO=**

Example:			
AT+GTGEO=gl200,0,3,101.412248,21.187891,1000,600,,,,,,,,,0008\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
GEO ID	1	0 – 4	
Mode	1	0 – 3	0
Longitude	<=11	(-)xxx.xxxxxx	
Latitude	<=10	(-)xx.xxxxxx	
Radius	<=7	50 – 6000000m	50
Check interval	<=5	0 30 – 86400sec	0
State mode	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ **<GEO ID>**: A numeric to identify the Geo-Fence.
- ✧ **<Mode>**: A numeric which indicates when to report the notification to the backend server based on the following:
 - 0: Disable the Geo-Fence on the specified GEO ID.
 - 1: Reports when enters the Geo-Fence.
 - 2: Reports when leaves the Geo-Fence.
 - 3: Reports when enters or leaves the Geo-Fence.
- ✧ **<Longitude>**: The longitude of a point which is defined as the center of the Geo-Fence circular region. The format is “(-)xxx.xxxxxx” and the value range is from “-180.000000” to “180.000000”. The unit is degree. West longitude is defined as negative starting with minus “-” and east longitude is defined as positive without “+”.
- ✧ **<Latitude>**: The latitude of a point which is defined as the centre of the Geo-Fence circular region. The format is “(-)xx.xxxxxx” and the value range is from “-90.000000” to “90.000000”. The unit is degree. South Latitude is defined as negative starting with minus “-” and north Latitude is defined as positive without “+”.

- ✧ **<Radius>**: The radius of the Geo-Fence circular region. The value range is (50-6000000) and the unit is meter.
- ✧ **<Check interval>**: The interval of GPS checking for the Geo-Fence alarm.
- ✧ **<state mode>**:
 - 0: It should report when get the state first time.
 - 1: It doesn't report until the state changes.

Note:

If the parameter **<Check interval>** is set as 0, **<Mode>** will be set as 0 automatically (To Geo-Fence 0, **<Mode>** will be restored at first and it could be used later when switch on Geo-Fence 0 via Function Key), because the terminal doesn't know when to check Geo-Fence if the parameter **<Check interval>** is 0.

The acknowledgement message of **AT+GTGEO** command:

➤ **+ACK:GTGEO**

Example:			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
GEO ID	1	0 – 4	
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.9. Speed Alarm

The AT+GTSPD command is used to configure speed alarm of the device. Based on the working mode set, the device will report speed alarm when its speed is outside or inside of a predefined range.

➤ AT+GTSPD=

Example:			
AT+GTSPD=gl200,1,5,40,30,60,,,,,,,,,,,,,0009\$			
AT+GTSPD=gl200,2,0,80,30,60,,,,,,,,,,,,,0009\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Mode	1	0 1 2	0
Min speed	<=3	0 – 400km/h	0
Max speed	<=3	0 – 400km/h	0
Duration	<=4	15 – 3600sec	60
Send interval	<=4	0 5 – 3600sec	300
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ <Mode>: A numeric to indicate the working mode of speed alarm.

0: Disable speed alarm.

1: Enable speed alarm. If the current speed is within the speed range defined by min speed and max speed, a speed alarm is sent.

2: Enable speed alarm. If the current speed is outside the speed range defined by min speed and max speed, a speed alarm is sent.

✧ <Min speed>: The lower limit of the speed range.

✧ <Max speed>: The upper limit of the speed range.

- ✧ *<Duration>*: According to the working mode, if the speed satisfies the specified speed range and maintains a period of time defined by *<Duration>*, the speed alarm will be triggered.
- ✧ *<Send interval>*: After the speed alarm is triggered, the speed alarm message is sent every interval time, but when the send interval is set to 0, the speed alarm message will be sent only once.

Note:

The parameter *<Duration>* and *<Send interval>* are invalid when GPS doesn't open always. When GPS doesn't open always, it will report speed alarm immediately if it detects the speed of the terminal is out of the allowed speed range.

The acknowledgement message of **AT+GTSPD** command:

➤ **+ACK:GTSPD**

Example:			
Parameter	Length (byte)	Range/Format	Default
+ACK:GTSPD,02010B,135790246811220,,0009,20100310172830,11F0\$			
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.10. Function Key Setting

The **AT+GTFKS** command is used to configure the function of the power key and the function key.

➤ **AT+GTFKS=**

Example:

AT+GTFKS=gl200,1, ,1,,,,,000A\$

Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Power key mode	1	0 1 2	1
Full power up	1	0 1	1
Function key mode	1	0 1 2 3 4	3
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ *<Power key mode>*: A numeric to indicate the working mode of the power key.
 - 0: Press power key will not power down the device.
 - 1: Press power key will power down the device.
 - 2: Press power key after long press for 1.5 seconds, it will work as SOS mode.
- ✧ *<Full power up>*: A numeric to indicate whether the terminal powers on completely after the terminal was power on because of charger inserted.
 - 0: Do not power on the terminal completely. And the terminal will only work on charging.
 - 1: Power on the terminal completely. The terminal will work normally as power on by power key long pressed.
- ✧ *<Function key mode>*: The working mode for the function key operation..
 - 0: Ignore the function key operation.
 - 1: Geo-Fence mode. Switch on/off the Geo-Fence ID 0 when the function key is long pressed. And after long press the function key, the terminal will report the message **+RESP:GTSWG** to inform to switch on or off Geo-Fence ID 0 via this operation.
 - 2: Geo-Fence in current position. Switch on/off the Geo-Fence 0 when the function key is long pressed and use the current position as the centre of Geo-Fence 0 when switch on the Geo Fence 0 via the function key. After long press the function key, the terminal will report the message **+RESP:GTSWG** immediately. And if this operation is expected to switch on Geo-Fence ID 0, the terminal will start GPS fixing to get the current position as the centre of Geo-Fence ID 0. After GPS fixing finishes, it will report the message **+RESP:GTGCR** to inform the result of GPS fixing and whether Geo-Fence ID 0 was switched on successfully.
 - 3: SOS mode. After long press for 3 seconds, the device will report the current position

according to the result of the latest GPS fixing and then start GPS fixing. After the GPS fixing finishes or timeout, the device will report the SOS message according the result of the GPS fixing.

- 4: Flight mode. After long press Function key, terminal will into the flight safety mode. If the terminal has been in flight safety mode, long press function key again, terminal will exit flight safety mode.

The acknowledgement message of **AT+GTFKS** command:

➤ **+ACK:GTFKS**

Example:			
+ACK:GTFKS, 02010B,135790246811220,,000A,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.11. Real Time Operation

The **AT+GTRTO** command is used to retrieve information from the terminal or control the terminal.

➤ **AT+GTRTO=**

Example: AT+GTRTO=gl200,0,,,,,000B\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Sub command	1	0 – F	
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ *<Sub command>*: A numeric to indicate the sub command to execute.

0 (**GPS**): Request GPS related information, including setting of *<GPS on need>*, *<Report items mask>*, *<Report mask>* of fixed report, GPS antenna type, GPS antenna status and the last known time of successful GPS fixing.

1 (**RTL**): Request the device to report its current position.

2 (**READ**): Request the device to report its entire configuration.

3 (**REBOOT**): Reboot the device remotely.

4 (**RESET**): Reset all parameters to factory default except parameter of **AT+GTBSI**, **AT+GTSRI**, **AT+GTTMA**.

5 (**PWROFF**): Power off the device remotely.

6 (**CID**): Request the device to report the ICCID of the installed SIM card.

7 (**CSQ**): Request the device to report the current GSM signal level.

8 (**VER**): Request the device to report version information including the device type, the firmware version and the hardware version.

9 (**BAT**): Request the device to report power supply related information including the external power supply status, current voltage of the battery, the battery charging status and the working mode of LED.

A (**TMZ**): Request the device to report the time zone setting.

B: (**INF**): Read the device information report function. The corresponding information will be reported via the message +RESP:GTINF.

C: (**RESERVED**)

D: (**RESERVED**)

E: (**GSV**): Request the device to report the GPS fix level.

F: (**GSM**): Request the device to report the cells' information.

The acknowledgement message of **AT+GTRTO** command:

➤ **+ACK:GTRTO**

Example:

+ACK:GTRTO,02010B,135790246811220,,GPS,000B,20100310172830,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Sub command	<=6	Sub command string	
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.12. White Call List Configuration

The AT+GTWLT command is used to set white call list table.

➤ AT+GTWLT=

Example: AT+GTWLT=gl200,1,1,2,13813888888,13913999999,,,,,000C\$			
Parameter	Length(byte)	Range/format	Default
password	4~8	'0'-'9','a'-'z','A'-'Z'	gl200
call filter	1	0 1 2	1
mobile start	1	1-10	
mobile end	1	1-10	
white number list	<=20*10		
reserved	0		
reserved	0		
reserved	0		
reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	

- ✧ <call filter>: A numeric to indicate whether to filter the incoming call according to <white number list> and <direct number list> before it try to send google link SMS to the incoming number.
 - 0: Do not return a google link SMS to incoming number no matter what the parameter <location by call> was set and no matter whether the incoming number is in the <white number list> or <direct number list>.
 - 1: Do not filter the incoming call. It will return a google link SMS to the incoming number as long as the parameter <location by call> was set as 1.
 - 2: Filter the incoming call. If the incoming number isn't in <white number list> or <direct number list>, it won't return a google link SMS to the incoming number even if the parameter <location by call> was set as 1.
- ✧ <mobile start>: A numeric to indicate the first index of the white call number to input. For example, if it is 1, it will update the white call list from the 1st one. If it is empty, it should not include <white number list> later.
- ✧ <mobile end>: A numeric to indicate the last index of the white call number to input. For example, if it is 2, it will update the white call list until the 2nd one. If it is empty, it should not include <white number list> later.
- ✧ <white number list>: A phone number list. It could include several phone numbers. And two close phone numbers are separated with ",". The number of the phone number in the list is up to the parameter <mobile start> and <mobile end>. For example, if <mobile start> is 1 and is <mobile end> 2, the <white number list> should include 2 phone numbers and the two numbers are separated by with ",".

The acknowledgment message of the AT+GTWLT command:

➤ +ACK:GTWLT

Example: +ACK:GTWLT,02010B, 135790246811220,,000C,20101029085505,0025\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

Note:

It is necessary to make sure the total size of the command is not greater than 160 if it is sent via SMS.

3.2.13. Google link SMS configuration

The AT+GTGLM command is used to configure whether to send SMS with google link for SOS and GEO event.

➤ AT+GTGLM=

Example: AT+GTGLM=gl200,1,1,2,13813888888,13913999999,,000D\$			
Parameter	Length(byte)	Range/format	Default
password	4~8	'0'-'9','a'-'z','A'-'Z'	gl200
google mode	1	0 1 2	0
mobile start	1	1-3	
mobile end	1	1-3	
direct number list	<=20*3		
reserved	0		
reserved	0		
reserved	0		
reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	

✧ <google mode>: A numeric to indicate whether to send a SMS with google link to the number in <direct number list> for SOS and GEO event.

0: Do not send a SMS with google link to the number is in the <direct number list> for SOS and GEO event.

1: Send a SMS with google link to the number is in the <direct number list> for SOS and GEO event and include the terminal name in the google hyperlink.

2: Send a SMS with google link to the number is in the <direct number list> for SOS and GEO event and do not include the terminal name in the google hyperlink.

- ✧ *<mobile start>*: A numeric to indicate the first index of the direct number to input. For example, if it is **1**, it will update the direct number list from the **1st** one. If it is empty, it should not include *<direct number list>* later.
- ✧ *<mobile end>*: A numeric to indicate the last index of the direct number to input. For example, if it is **2**, it will update the direct number list until the **2nd** one. If it is empty, it should not include *<direct number list>* later.
- ✧ *<direct number list>*: A phone number list. It could include several phone numbers. And two close phone numbers are separated with ",". The number of the phone number in the list is up to the parameter *<mobile start>* and *<mobile end>*. For example, if *<mobile start>* is **1** and is *<mobile end>* **2**, the *<direct number list>* should include **2** phone numbers and the two numbers are separated by with ",".

The acknowledgment message of the **AT+GTGLM** command:

➤ **+ACK:GTGLM**

Example: +ACK:GTGLM,02010B,135790246811220,,000D,20101029085505,0025\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.14. Auto unlock SIM-PIN

The **AT+GTPIN** command is used to configure whether to automatically unlock the PIN of the SIM card in the device.

➤ **AT+GTPIN=**

Example: AT+GTPIN=gl200,1,1234,1,,,,,000E\$			
Parameter	Length(byte)	Range/format	Default
password	4~8	'0'-'9','a'-'z','A'-'Z'	gl200
auto unlock PIN	1	0 1	1
PIN	4-8	'0'-'9'	
PIN checking	1	0 1	
reserved	0		
reserved	0		
reserved	0		
reserved	0		
Serial number	4	0000 – FFFF	

Tail character	1	\$	
----------------	---	----	--

- ✧ *<auto unlock PIN>*: A numeric to indicate whether to unlock the SIM-PIN for the device.
 - 0: Do not unlock SIM-PIN automatically.
 - 1: Each time the device powers on, it will detect whether the SIM card is locked with a PIN. If it is locked, the device will unlock the PIN automatically for one time.
- ✧ *<PIN>*: The PIN code which is used when unlocks PIN automatically. If it is empty, the PIN code saved in the device will be cleared.
- ✧ *<PIN checking >*: A numeric to indicate whether to lock the device with SIM-PIN.
 - 0: Do not lock the SIM-PIN.
 - 1: Lock the SIM-PIN.

The acknowledgment message of the **AT+GTPIN** command:

➤ **+ACK:GTPIN,**

Example:			
+ACK:GTPIN,02010B, 135790246811220,,000E,20101029085505,0027\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.15. Digital Output

The **AT+GTOUT** command is used to output specified wave shape from the digital output port. Total three wave shapes are supported as below. If wave shape 1 is set, the output port will maintain the specified state until power off or restart.

Wave shape 1:

- ✓ *<Duration>* = 0ms, *<Toggle Times>* = 0

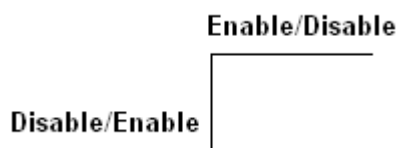


Figure 3: Wave Shape 1

Wave shape 2:

- ✓ *<Duration>* = 500ms, *<Toggle Times>* = 1




Figure 4: Wave Shape 2

Wave shape 3:

✓ $\langle \text{Duration} \rangle = 800\text{ms}$, $\langle \text{Toggle Times} \rangle = 3$

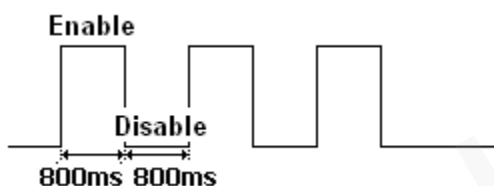


Figure 5: Wave Shape 3

Wave shape 4:

✓ $\langle \text{Duration} \rangle = 800\text{ms}$, $\langle \text{Toggle Times} \rangle = 0$, In this case, the square wave will maintain until it is changed again or power off or restart.

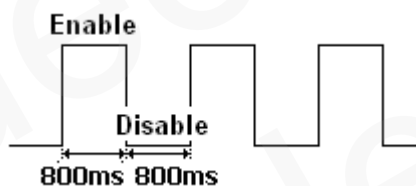


Figure 6: Wave Shape 4

➤ **AT+GTOUT=****Example:**

AT+GTOUT=gl200,1,8,1,,,,,000F\$

Parameter	Length(byte)	Range/format	Default
password	4~8	'0'-'9','a'-'z','A'-'Z'	gl200
output status	1	0 1	
duration	≤ 3	0-255 ($\times 100\text{ms}$)	0
toggle times	≤ 3	0-255	0
reserved	0		
reserved	0		
reserved	0		
reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	

✧ $\langle \text{output status} \rangle$: Used only for the wave shape 1 as shown in **Figure 3** to set the final status of the output port. If the field is empty, it won't change the output state of the IO.

0: Output disable status.

1: Output enable status.

- ✧ <Duration>: Please refer to **Figure 3**, **Figure 4**, **Figure 5** and **Figure 7**. Unit is 100ms.
- ✧ <Toggle Times>: Please refer to **Figure 3**, **Figure 4**, **Figure 5** and **Figure 8**.

The acknowledgment message of the **AT+GTOUT** command:

➤ **+ACK:GTOUT**

Example: +ACK:GTOUT,02010B,135790246811220,,000F,20101029085505,0028\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, $X \in \{'A'-'Z','0'-'9'\}$	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.16. Digital Input Port Settings

➤ **AT+GTDIS**

Example: AT+GTDIS=gl200,1,1,5,,,,,0010\$			
Parameter	Length(byte)	Range/format	Default
password	4~8	'0'-'9','a'-'z','A'-'Z'	gl200
Input ID	1	1	1
Mode	1	0 1 2 3	0
Debounce time	<=2	0-20 (×10ms)	5
reserved	0		
reserved	0		
reserved	0		
reserved	0		
reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	

- ✧ <Input ID>: The ID of the digital input. It is always 1. If the field is empty, the device will ignore the following settings about the digital input 1, i.e. change nothing about the digital input 1.
- ✧ <Mode>: A numeric to check whether to enable the digital input.
 - 0: Disable the digital input, i.e. ignore the status changing of the digital input.
 - 1: Enable the digital input. If the status of the input change, the device will report the message **+RESP:GTDIS** to the backend server to inform the latest status.
 - 2: If the status of the input is changed to 0, the device will disable the sleep mode. If

the status of the input is changed to 1, the device will enable the sleep mode.

- 3: If the status of the input is changed to 0, it will trigger the SOS event.

✧ <Debounce time>: The time for debouncing.

The acknowledgment message of the AT+GTDIS command:

➤ +ACK:GTDIS,

Example: +ACK:GTDIS,02010B,135790246811220,,0010,20101029085505,0028\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.17. Protocol watchdog

The AT+GTDG command is used to reboot the device in a time based manner or upon ignition. This helps the device avoid working in an exceptional status for a long time. Besides these two automatically reboot method, the device also supports to use the digital input to trigger the reboot manually.

➤ AT+GTDG=

Example: AT+GTDG=gl200,1,,1,0130,,1,1,,,,,0011\$ AT+GTDG=gl200,2,30,,,,,1,1,,,,,0011\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Mode	1	0 1 2	0
Ignition Frequency	<=3	10-120	60
Interval	<=2	1-30	30
Time	4	HHMM	0200
Reserved	0		
Report Before Reboot	1	0 1	1
Input ID	1	0 1	0
Unit	1	0 1	0
Gsm interval	4	5-1440	60
Pdp interval	4	5-1440	60
Reserved	0		
Serial number	4	0000 – FFFF	

Tail character	1	\$	\$
----------------	---	----	----

- ✧ *<Mode>*: Working mode.
 - 0: Disable this function
 - 1: Reboot periodically according to the *<Interval>* and *<Time>* setting.
 - 2: Reboot when ignition on.
- ✧ *<Ignition Frequency>*: When the working mode is 2, if the time interval between two adjacent ignitions is greater than the specified value, the device will automatically reboot upon ignition on.
- ✧ *<Interval>*: The interval to reboot the device.
- ✧ *<Time>*: At what time to perform the reboot operation when *<Interval>* is met.
- ✧ *<Report Before Reboot>*: Whether to report the **+RESP:GTD OG** message before reboot. 0 means no report, 1 to report. If this is enabled, the device will make a real-time location before sending the message in order to send it with the current location information.
- ✧ *<Input ID>*: ID of the digital input port which is used to trigger the manually reboot. 0 means do not use manual reboot. Only port 1 is supported.
- ✧ *<Unit>*: Unit.
 - 0: Unit is day.
 - 1: Unit is hour.
- ✧ *<Gsm interval>*: The time before rebooting the device without GSM network. 0 means not rebooting the device if there is no GSM coverage.
- ✧ *<Pdp interval>*: The time before rebooting the device if it is failed to activate GPRS. 0 means not rebooting the device if it is failed to activate GPRS.

The acknowledgment message of the **AT+GTD OG** command:

➤ **+ACK:GTD OG**

Example:			
Parameter	Length (byte)	Range/Format	Default
+ACK:GTD OG,02010B,135790246811220,,0011,20101029085505,0028\$			
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.18. Safe Flight Manager

The **AT+GTSFM** command is used to configure the condition to enter or exit safe flight mode.

➤ **AT+ GTSFM =**

Example:
AT+ GTSFM =gl200,1,30,10,1000,240,,,0016\$
AT+ GTSFM =gl200,0,30,10,1000,240,,,0016\$

Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
On Off enable	1	0 1	0
Off Time	5	0 – 300min	
On Time	5	0 – 300min	
SF Alt	<=8	(-)xxxxx.x m	
SF Speed	<=5	0.0 – 999.9km/h	
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <On Off enable>: Enable or disable “SFM” based functionality.
 - 0: Disable
 - 1: Enable
- ✧ <Off Time>: When “SFM” is enabled and the device failed to get GPS position for “Off Time” minutes, GL200 will enter into safe flight mode, i.e. RF will be turned off. Before doing that, GL200 has to send the message +**RESP:GTROF** to the server and output “RESPOND SFM:GSMOF” to UART. So it will need one minute more to make sure the report is sent. If it is 0, RF will be turned off immediately when the device failed to get GPS position.
- ✧ <On Time> If GPS signal is back and available for “On Time” minutes GL200 will exit from safe flight mode, i.e. turning on RF. This works in “AND” relation to “SF Alt” and “SF Speed” parameters. After RF is turned on, it will report the message +**RESP:GTRON** to server and output “RESPOND SFM:GSMON” to UART. If it is 0, GL200 will turn on RF immediately after first successful GPS fix (with respect to SF Alt and SF Speed settings).
- ✧ <SF Alt> If GPS signal is available for “On Time” minutes and unit’s altitude is lower than “SF Alt”, GL200 will turn on RF. If set to 0, this condition is ignored.
- ✧ <SF Speed>: If GPS signal is available for “On Time” minutes and unit’s speed is lower than “SF Speed”, GL200 will turn on RF. If set to 0, this condition will be ignored.

The acknowledgment message of the **AT+ GTSFM** command:

➤ **+ACK: GTSFM**

Example:
+ACK: GTSFM,02010B,135790246811220,,0011,20101029085505,0028\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	10		
Serial number	4	0000 – FFFF	

Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.19. Data transfer between UART and backend server

The AT+GTDAT command is used to transfer the data between UART and the backend server.

➤ AT+GTDAT=

Example:

AT+GTDAT=gl200,0,,data needs to be sent,0,,,0016\$

AT+GTDAT=gl200,1,,config command to the CAN bus device,1,,,0016\$

AT+GTDAT=gl200,2,,data to the backend server,,,,0011\$

Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Command Type	1	0 1 2	0
Reserved	0		
Data	<=100	ASCII code	
Need ack	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ <Command Type>: A numeric to indicate the direction of the transferred data.

- 0: The data should be transferred from UART to the backend server. (**Short Format**)
- 1: The data should be transferred from the backend server to UART.
- 2: means to send message to the backend server with +RESP:GTDAT (**Long Format**).

✧ <Data>: The data to be transferred. It should be printable ASCII string.

✧ <Need ack>: A numeric to indicate whether the device should reply +ACK message to the backend server.

- 0: Do not send +ACK:GTDAT to the backend server.
- 1: Send +ACK:GTDAT to the backend server.

The acknowledgment message of the AT+GTDAT command:

➤ +ACK:GTDAT

Example:

+ACK:GTDAT,02010B,135790246811220,,0011,20101029085505,0028\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF,	

		$X \in \{'A'-'Z', '0'-'9'\}$	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.20. Network Select

The AT+GTNTS command is used to set network when in low signal.

➤ AT+ GTNTS =

Example: AT+GTNTS=gl200,1,20,2,46001,,,10,,FFFF\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
enable	1	0 1	0
Rssi threshold	3	0 – 35	
Interval	3	0 – 300min	
Oper1	10		
Oper2	10		
Oper3	10		
GSM interval	3	0 – 300min	10
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <Enable>: Enable or disable “NTS” based functionality.
 - 0: Disable
 - 1: Enable
- ✧ <Rssi threshold>: The threshold of the CSQ value.
- ✧ <Interval>: The interval time to change to another operator.
- ✧ <Oper1>: The first network it will select when under threshold over interval time.
- ✧ <Oper2>: The second network it will select when under threshold over interval time.
- ✧ <Oper3>: The third network it will select when under threshold over interval time.
- ✧ <GSM Interval>: The time in minute before changing the operator without GSM network.

The acknowledgment message of the AT+ GTNTS command.

➤ +ACK: GTNTS

Example: +ACK: GTNTS,02010B,135790246811220,,0011,20101029085505,0028\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF,	

		X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.21. Outside Working Hours

To protect the privacy of the driver when they are off duty, the device could be configured to report empty location information during the outside working hours. The command **AT+GTOWH** is used to define the working hours and the working mode to protect the privacy. When this function is enabled, the device will report empty latitude, empty longitude, empty LAC and empty Cell ID in all the report messages except for **+RESP:GTSOS**.

➤ **AT+GTOWH=**

Example:			
AT+GTOWH=gv200,1,1F,0900,1200,1300,1730,,,1,1,0,0,0,,,,,0012\$			
Parameter	Length(byte)	Range/Format	Default
Password	4 – 6	'0' – '9' 'a' – 'z' 'A' – 'Z'	gv200
Mode	1	0 1 2 3	0
Day of Work	<=2	0 – 7F	1F
Working Hours Start1	4	HHMM	0900
Working Hours End1	4	HHMM	1200
Working Hours Start2	4	HHMM	1300
Working Hours End2	4	HHMM	1800
Reserved	0		
Reserved	0		
Digital Input ID	1	0 1	0
Output ID	1	0 – 1	0
Output Status	1	0 1	
Duration	<=3	0 – 255(×100ms)	0
Toggle Times	<=3	0 – 255	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial Number	4	0000 – FFFF	
Tail Character	1	\$	\$

✧ **<Mode>**: Working mode.

- 0: Disable this function.
- 1: Manual mode. By using the equipment connected to the specified digital input, the

driver manually enable the time checking. If the device finds it is outside the working hours, it will hide the location information in the report messages. Otherwise report normally.

- 2: Full manual mode. By using the equipment connected to the specified digital input, the driver has full control to the privacy protection. The device will not check the time against the working hours arrange. It just hides the location information when the input is enabled and reports normally when the input is disabled.
- 3: Automatic mode. Under this mode, the device will ignore the status of the digital input. It will automatically check the current time against the working hours arrange. If outside the working hours, hide the location information. Otherwise report normally.

✧ *<Day of Work>*: Specify the working days in a week in a bitwise manner.

- Bit 0 for Monday
- Bit 1 for Tuesday
- Bit 2 for Wednesday
- Bit 3 for Thursday
- Bit 4 for Friday
- Bit 5 for Saturday
- Bit 6 for Sunday

For each bit, 0 means off day, 1 means working day.

- ✧ *<Working Hours Start1>*, *<Working Hours End1>*: The first period of the working hours in a day.
- ✧ *<Working Hours Start2>*, *<Working Hours End2>*: The second period of the working hours in a day.
- ✧ *<Digital Input ID>*: The input ID used to trigger this function when mode is 1 or 2. Only digital input port 1 is supported.
- ✧ *<Output ID>*, *<Output Status>*, *<Duration>* and *<Toggle Times>*: When this function is enabled and current is off duty time, the specified wave will be output to the specified output.

The acknowledgment message of **AT+GTOWH** command:

➤ **+ACK:GTOWH**

Example:			
Parameter	Length(byte)	Range/Format	Default
Protocol Version	6	XX0000 – XXXFFF, X ∈ { 'A' – 'Z', '0' – '9' }	
Unique ID	15	IMEI	
Device Name	<=20	'0' – '9' 'a' – 'z' 'A' – 'Z' '-' '_'	
Serial Number	4	0000 – FFFF	
Send Time	14	YYYYMMDDHHMMSS	
Count Number	4	0000 – FFFF	
Tail Character	1	\$	\$

3.2.22. Store Command String

The **AT+GTCMD** command is used to store the commands which will be used by the command **AT+GTUDEF**.

➤ **AT+GTCMD=**

Example: AT+GTCMD=gl200,1,1,AT+GTRTO=gl200,0,,,,,000B\$,,,,,0005\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
mode	1	0-1	0
Store cmd id	3	0 – 31	
Command string	200	AT command	
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ *<Mode>*:

- 0: Delete the stored command.
- 1: Add the stored command.

✧ *<Store cmd id>*: A numeric to identify the stored command.

✧ *<Command string>*: the whole content of the stored command.

Note:

The firmware GL200R00A17V10M32_SST does not support this function.

The acknowledgement message of **AT+GTCMD** command:

➤ **+ACK:GTCMD**

Example: +ACK:GTCMD,02010B,135790246811220,,0005,20100310172830,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.2.23. User Defined Function

The **AT+GTUDF** command is used to bind input event and the stored commands. The input events will trigger the corresponding stored commands..

➤ **AT+GTUDF=**

Example:			
AT+GTUDF=gl200,1,1,FFFFFFFF,30,,,FFFFFFFF,1,,,,,0005\$			
Parameter	Length (byte)	Range/Format	Default
Password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
mode	1	0-2	0
Group id	2	0 – 31	
Input id mask	16	0-FFFFFFFFFFFFFFFF	
Debounce time	5	0-86400(s)	0
Reserved			
Reserved			
Stocmd id mask	16	0-FFFFFFFF	
Stocmd ack	1	0 1	0
Reserved			
Reserved			
Reserved			
Reserved			
Serial number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ *<Mode>*:

- 0: Disable the group.
- 1: Enable the group.
- 2: Delete the group.

✧ *<Group id>*: A numeric to identify the group of input events and stored commands to execute.

✧ *<Input id mask>*: The bitwise mask to indicate the input events that the group cares about...

Bit0(00000001): select id1

Bit1(00000002): select id2

Bit2(00000004): select id3

Bit3(00000008): select id4

For example:

Bit(00000003): select id1,id2

Bit(00000017): select id1,id2,id3,id5

ID	Bit	Item to Mask
1	Bit 0	Power on finished
2	Bit 1	Ignition on
3	Bit 2	Ignition off

4	Bit 3	The GPRS network is attached
5	Bit 4	The GPRS network is not attached
6	Bit 5	The GSM network registered
7	Bit 6	The GSM network not registered
8	Bit 7	Network roaming
9	Bit 8	Network non roaming
10	Bit 9	SIM card is locked
11	Bit 10	GPS is opened
12	Bit 11	GPS is closed
13	Bit 12	The device is reset
14	Bit 13	The device is moving
15	Bit 14	External charge inserted
16	Bit 15	No external charge.
17	Bit 16	The device is charging
18	Bit 17	The device is not charging
19	Bit 18	External battery inserted
20	Bit 19	No external battery
21	Bit 20	Digital input 1 is low
22	Bit 21	Digital input 1 is high
23	Bit 22	SIM card is inserted.
24	Bit 23	SIM card is not inserted
25	Bit 24	GPS external antenna is inserted
26	Bit 25	GPS external antenna is not inserted
27	Bit 26	Inside the Geo 0
28	Bit 27	Outside the Geo 0
29	Bit 28	Inside the Geo 1
30	Bit 29	Outside the Geo 1
31	Bit 30	Inside the Geo 2
32	Bit 31	Outside the Geo 2
33	Bit 32	Inside the Geo 3
34	Bit 33	Outside the Geo 3
35	Bit 34	Inside the Geo 4
36	Bit 35	Outside the Geo 4
37	Bit 36	Inside the speed range
38	Bit 37	Outside the speed range
39	Bit 38	Messages need to be sent
40	Bit 39	No messages need to be sent

- ✧ <Debounce time>: The debounce time for input events before executing the specified stored commands.
- ✧ <Stocmd id mask>: The bitwise of the stored commands which will be executed after the state of the group becomes TRUE (i.e. all cared input events happen.).

✧ <Stocmd ack>:

0: Do not send acknowledgement message when execute the stored command.

1: Send acknowledgement message when execute the stored command.

Note:

The maximum number of the stored commands to execute in a group is five and the firmware GL200R00A17V10M32_SST does not support this function.

The acknowledgement message of AT+GTUDF command:

➤ +ACK:GTUDF

Example:

+ACK:GTUDF,02010B,135790246811220,,0005,20100310172830,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Serial number	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.3. Report

3.3.1. Position Related Report

3.3.1.1. General Position Report

- +RESP:GTFRI: report of AT+GTFRI
- +RESP:GTGEO: report of AT+GTGEO
- +RESP:GTSPD: report of AT+GTSPD
- +RESP:GTSOS: report after long press the function if the function key is enabled and the mode is SOS mode.
- +RESP:GTRTL: report of AT+GTRTO-RTL
- +RESP:GTPNL: The first location after the device powers on.
- +RESP:GTNMR: non movement is detected by motion sensor, according to the setting of AT+GTNMD
- +RESP:GTDIS: the status of digital input is detected being changed if the parameter <Enable> is set as 1 in the command AT+GTDIS,
- +RESP:GTDG: the protocol watchdog reboot message.
- +RESP: GTIGL: The location message for ignition on and ignition off.

Example:

+RESP:GTFRI,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTFRI,02010B,135790246811220,,0,0,2,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,0,4.3,92,70.0,121.354335,31.222073,20090101000000,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTGEO,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTSPD,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTSOS,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTRTL,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTPNL,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTNMR,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTDIS,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

+RESP:GTDOG,02010B,135790246811220,,0,0,1,1,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,2000.0,20090214093254,11F0\$

+RESP:GTIGL,02010B,867844000125073,,,00,1,5,,,,117.201362,31.832724,20120821032037,,,,,,000C\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9' '-' '_'}	
Unique ID	15	IMEI	
Device name	20		
Report ID	1	0 – 4	
Report type	1	0 1	
Number	<=2	0 – 15	
GPS accuracy	<=2	0 1 – 50	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	(-)xxxxx.x m	

Longitude	<=11	(-)xxx.xxxxxx	
Latitude	<=10	(-)xx.xxxxxx	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
battery percentage	3	0-100	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <Report ID>: ID of Geo-Fence in +**RESP:GTGEO**, 0 for other reports.
- ✧ <Report type>: type of the report for +**RESP:GTGEO** and +**RESP:GTSPD** and +**RESP:GTNMR**, 0 for other reports.
 - For +**RESP:GTFRI**
 - 0: This is a common scheduled position report.
 - 1: This is a turning point.
 - For +**RESP:GTGEO**
 - 0: exit the corresponding Geo-Fence.
 - 1: enter the corresponding Geo-Fence.
 - For +**RESP:GTSPD**
 - 0: Outside the speed range.
 - 1: Inside the speed range.
 - For +**RESP:GTNMR**
 - 0: The state of the device changed from motion to rest.
 - 1: The state of the device changed from rest to motion.
 - In the +**RESP:GTDIS** report message generated by the digital input
 - 0: The current logical status of the input port is disable status.
 - 1: The current logical status of the input is enable status.
 - In the message of ignition on and ignition off message +**RESP:GTIGL**
 - 0: the engine is ignition on.
 - 1: the engine is ignition off.
 - For +**RESP:GTD OG**
 - 0: Reboot periodically according to the <Interval> and <Time> setting or ignition on or <Input ID> cases to reboot.
 - 1: GPRS network registered unsuccessful cases to reboot
 - 2: Without GSM signal cases to reboot
- ✧ <Number>: Number of points in one report message. According to the setting of fixed report, there could be up to 15 points in one +**RESP:GTFRI** report. For other reports, this is always 1. If there are more than 1 point in the report, information from <GPS accuracy> to <Odo mileage> is repeated for each point.

- ✧ <GPS accuracy>: The HDOP defined in NMEA0183. The range of value is 1 – 50. The smaller the value, the higher the precision. Different from NMEA0183, 0 here means no fix, while GPS accuracy between 0 and 1 is set to 1.
- ✧ <Speed>: The speed from GPS.
- ✧ <Azimuth> The azimuth from GPS.
- ✧ <Altitude>: The height above sea level from GPS.
- ✧ <Longitude>: The longitude of the current position. The format is “(-)xxx.xxxxxx” and the value range is from “-180.000000” to “180.000000”. The unit is degree. West longitude is defined as negative starting with minus “-” and east longitude is defined as positive without “+”.
- ✧ <Latitude>: The latitude of the current position. The format is “(-)xx.xxxxxx” and the value range is from “-90.000000” to “90.000000”. The unit is degree. South Latitude is defined as negative starting with minus “-” and north Latitude is defined as positive without “+”.
- ✧ <GPS UTC time>: UTC time from GPS.
- ✧ <MCC>: Mobile country code. It is 3 digits in length and ranges from 000-999.
- ✧ <MNC>: Mobile network code. It is 3 digits in length and ranges from 000-999.
- ✧ <LAC>: Location area code in hex format.
- ✧ <Cell ID>: Cell ID in hex format.
- ✧ <Odo mileage>: The total mileage in the position defined by <Latitude> and <Longitude>. If <ODO enable> was set as 0 in the command AT+GTCFG, the field will be empty.
- ✧ <battery percentage>: The current volume of the battery in percentage.

3.3.1.2. Location by Call Report

➤ +RESP:GTLBC:

Example:

+RESP:GTLBC,02010B,135790246811220,,+8613800000000,1,4,3,92,70.0,121.354335,31.2
22073,20090214013254,0460,0000,18d8,6141,00,,20090214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Call number	<=20	phone number	
GPS accuracy	<=2	0 1 – 50	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Longitude	<=11	± XXX.XXXXXX	
Latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	

LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Reserved2	0		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ <Call number>: the phone number of the incoming call which initiates this report.

3.3.1.3. Location as centre of Geo-Fence

If function key mode was set as 2 and long press function key to switch on Geo-Fence 0, the terminal will start GPS fixing to get the current position as the centre of Geo-Fence 0. And after GPS fixing finishes, the terminal will report the message **+RESP:GTGCR**.

➤ +RESP:GTGCR:

Example:

+RESP:GTGCR,02010B,135790246811220,,3,50,180,2,0.4,296,-5.4,121.391055,31.164473,20100714104934,0460,0000,1878,0873,00,,20100714104934,000C\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Geo mode	1	0 1 2 3	
Geo radius	<=7	50 – 6000000m	
Geo check interval	<=5	0 30 – 86400sec	
GPS accuracy	<=2	0 1 – 50	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Longitude	<=11	± XXX.XXXXXX	
Latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Reserved2	0		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	

Tail character	1	\$	\$
----------------	---	----	----

- ✧ *<Geo mode>*: the new mode of Geo-Fence 0. Please refer to the parameter *<Mode>* in the command **AT+GTGEO**.
- ✧ *<Geo radius>*: the radius of Geo-Fence 0. Please refer to the parameter *<Radius>* in the command **AT+GTGEO**.
- ✧ *<Geo check interval>*: the check interval of Geo-Fence 0. Please refer to the parameter *<Check interval>* in the command **AT+GTGEO**.
- ✧ *<Longitude>*: The longitude of the current position. If it is successful to fix position this time, this longitude will be replace the longitude of the centre of Geo-Fence 0.
- ✧ *<Latitude>*: The latitude of the current position. If it is successful to fix position this time, this latitude will be replace the latitude of the centre of Geo-Fence 0.

3.3.2. Device Information Report

➤ +RESP:GTINF:

Example:			
+RESP:GTINF,02010B,135790246811220,,41,898600810906F8048812,16,0,0,0,,4.10,0,0,0,0,20100214013254,,,+0800,0,20100214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
State	2	21 22 41 42	
ICCID	20		
CSQ RSSI	<=2	0 – 31 99	
CSQ BER	<=2	0 – 7 99	
External power supply	1	0 1	
Mileage	<=9	0.0 – 4294967.0Km	
Reserved	0		
Battery voltage	<=4	0.0 – 4.50V	
Charging	1	0 1	
LED on	1	0 1	
GPS on need	1	0 1	
GPS antenna type	1	0 1	
GPS antenna state	1	0	
Last GPS fix UTC time	14	YYYYMMDDHHMMSS	
battery percentage	3	0-100	
Flash type	1	0 1	
Lock state	1	0 1	
Reserved	0		
Reserved	0		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <State>: The current motion state of the device.
 - 21: The device attached vehicle is ignition on and motionless.
 - 22: The device attached vehicle is ignition on and moving.
 - 41: The device is motionless without ignition on.
 - 42: The device is moving without ignition on.
- ✧ <ICCID>: The ICCID of the installed SIM card.
- ✧ <CSQ RSSI>: The GSM signal strength level.

- ✧ <CSQ BER>: The quality of the GSM signal.
- ✧ <External power supply>: Whether the external power supply is connected.
 - 0: Not connected
 - 1: Connected
- ✧ <Mileage>: The total mileage is base on <ODO Initial mileage> which is a parameter in AT+GTCFG.
- ✧ <Battery voltage>: The voltage of the battery.
- ✧ <Charging>: Whether the battery is charging when the external power supply is connected.
 - 0: Not charging
 - 1: Charging
- ✧ <LED on>: The setting of <LED on> in AT+GTCFG.
- ✧ <GPS on need>: The setting of <GPS on need> in AT+GTCFG.
- ✧ <GPS antenna type>: A numeric to indicate which GPS antenna is working now.
 - 0: inside GPS antenna
 - 1: outside GPS antenna
- ✧ <GPS antenna state>: the status of the working GPS antenna.
 - 0: The antenna is working
- ✧ <Last GPS fix UTC time>: The UTC time of the latest successful GPS fixing.
- ✧ <Flash type>: A numeric to indicate what the type of flash is.
 - 0: SST flash
 - 1: NMX flash
- ✧ <Lock state>: The state of in the external battery kit, please refer to the parameter <State> in the message +RESP:GTLWSW (refer to the document [1]).

3.3.3. Report for Querying

These are the report of real time querying by command **AT+GTRTO**.

➤ **+RESP:GTGPS:** The report for real time operation GPS

Example: +RESP:GTGPS,02010B,135790246811220,,0,1F,1F,0,0,20100214013254,20100214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, $X \in \{'A'-'Z', '0'-'9'\}$	
Unique ID	15	IMEI	
Device name	20		
GPS on need	1	0 1 2	
GPS fix delay	3	5 – 60sec	
GPS antenna type	1	0 1	
Report items mask	<=4	0000 – FFFF	
FRI report mask	<=4	0000 – FFFF	
GPS antenna state	1	0	
Last GPS fix UTC time	14	YYYYMMDDHHMMSS	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ **<FRI report mask>**: The setting of **<Report mask>** in **AT+GTFRI**.

➤ **+RESP:GTALL:** The report for real time operation READ

Example: +RESP:GTALL,02010B,867844000904006,,BSI,cmnet,,,,,,,,SRI,3,,2,220.178.67.210,10014,192.0.0.0,0,,5,1,,,,CFG,gl200,GL200,1,0,0,2,5,001F,0,,0FFF,0,1,1,300,1,0,20491231235959,0,0,,NMD,0,2,3,2,300,300,2,3,0,,,,TMZ,+0800,0,FRI,2,0,,0000,0000,180,180,180,180,001F,100,100,0,5,50,5,0,,GEO,0,2,117.201422,31.833124,500,30,0,,,,,1,1,117.201422,31.833124,500,30,0,,,,,2,3,117.201422,31.833124,500,30,0,,,,,3,0,0,0,50,0,0,,,,,4,0,0,0,50,0,0,,,,,SPD,1,10,20,15,30,,,,,FKS,1,1,3,,,,WLT,1,,,,,GLM,0,,,,,PIN,1,0,,,,DIS,1,1,5,,,,DOG,1,60,3,0200,,1,0,1,60,60,,SFM,0,30,10,1000.0,200.0,,NTS,0,30,10,,10,,OWH,0,1F,0900,1200,1300,1500,,,1,1,1,10,0,,,20130228210910,50A2\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, $X \in \{'A'-'Z', '0'-'9'\}$	
Unique ID	15	IMEI	
Device name	20		
BSI	3	BSI	BSI
APN	<=40		

APN user name	<=30		
APN password	<=30		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
SRI	3	SRI	SRI
Report mode	1	0 – 5	0
Reserved	0		
Buffer enable	1	0 1	1
Main server IP/domain name	<=60		
Main server port	<=5	0 – 65535	0
Backup server IP	<=15		192.0.0.0
Backup server port	<=5	0 – 65535	0
SMS gateway	<=20		
Heartbeat interval	<=3	0 10 – 360min	0
SACK enable	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
CFG	3	CFG	CFG
New password	4 – 6	'0' – '9', 'a' – 'z', 'A' – 'Z'	gl200
Device name	20		GL200
ODO enable	1	0 1	0
ODO mileage	<=9	0.0 – 4294967.0Km	0
GPS on need	1	0 1 2 3	1
GPS fix delay	3	5 – 60sec	5
Report items mask	<=4	0000 – FFFF	1F
Gsm report	1	0 1 2 3	0
Reserved	0		
Event mask	4	0000-FFFF	FFF
EPB mode	1	0 1	0
LED on	1	0 1 2	1
Info report enable	1	0 1	1
Info report interval	<=5	30 – 86400sec	300
Location by call	1	0 1	1
Expiry enable	1	0 1	0
Expiry time	14	YYYYMMDDHHMMSS	20491231235959
Agps mode	1	0 1	0

Sleep enable	1	0 1	0
Reserved	0		
NMD	3	NMD	NMD
mode	1	0-F	
Non-movement duration	<=3	1 – 255(×15sec)	2
Movement duration	<=3	1 – 50(×100ms)	3
Movement threshold	1	2 – 9	2
rest fix interval	5	5 – 86400sec	300
rest send interval	5	5 – 86400sec	300
pm rest threshold	1	2 – 9	2
pm motion threshold	1	2 – 9	3
Urc report	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
TMZ	3	TMZ	TMZ
Time Zone	5	- +HHMM	
Daylight Saving	1	0 1	
FRI	3	FRI	FRI
Mode	1	0 1 2 3 4 5	0
Discard no fix	1	0 1	1
Reserved	0		
Reserved	0		
Begin time	4	HHMM	0000
End time	4	HHMM	0000
Check interval	<=5	5 – 86400sec	180
Send interval	<=5	5 – 86400sec	180
Ignition Check interval	<=5	5 – 86400sec	180
Ignition Send interval	<=5	5 – 86400sec	180
Report mask	<=4	0000 – FFFF	1F
Distance	<=5	50 – 65535m	1000
Mileage	<=5	50 – 65535m	1000
movement detect mode	1	0 1	0
movement speed	<=3	1-999(km/h)	5
movement distance	<=4	1-9999(m)	50
movement send number	1	1-5	5
corner	3	0 - 180	0
Reserved	0		
GEO	3	GEO	GEO

GEO ID0	1	0	0
Mode	1	0 – 3	0
Longitude	<=11	±xxx.xxxxxx	0.00000
Latitude	<=10	±xx.xxxxxx	0.00000
Radius	<=7	50 – 6000000m	50
Check interval	<=5	0 30 – 86400sec	0
State mode	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
GEO ID1	1	1	1
Mode	1	0 – 3	0
Longitude	<=11	±xxx.xxxxxx	0.00000
Latitude	<=10	±xx.xxxxxx	0.00000
Radius	<=7	50 – 6000000m	50
Check interval	<=5	0 30 – 86400sec	0
State mode	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
GEO ID2	1	2	2
Mode	1	0 – 3	0
Longitude	<=11	±xxx.xxxxxx	0.00000
Latitude	<=10	±xx.xxxxxx	0.00000
Radius	<=7	50 – 6000000m	50
Check interval	<=5	0 30 – 86400sec	0
State mode	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		

GEO ID3	1	3	3
Mode	1	0 – 3	0
Longitude	<=11	±xxx.xxxxxx	0.00000
Latitude	<=10	±xx.xxxxxx	0.00000
Radius	<=7	50 – 6000000m	50
Check interval	<=5	0 30 – 86400sec	0
State mode	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
GEO ID4	1	4	4
Mode	1	0 – 3	0
Longitude	<=11	±xxx.xxxxxx	0.00000
Latitude	<=10	±xx.xxxxxx	0.00000
Radius	<=7	50 – 6000000m	50
Check interval	<=5	0 30 – 86400sec	0
State mode	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
SPD	3	SPD	SPD
Mode	1	0 1 2	0
Min speed	<=3	0 – 400km/h	0
Max speed	<=3	0 – 400km/h	0
Duration	<=4	15 – 3600sec	60
Send interval	<=4	30 – 3600sec	300
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		

Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
FKS	3	FKS	FKS
Power key enable	1	0 1	1
Full power up	1	0 1	1
Function key mode	1	0 1 2 3	3
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
WLT	3	WLT	WLT
call filter	1	0 1 2	1
white number	20		
white number	20		
white number	20		
white number	20		
white number	20		
white number	20		
white number	20		
white number	20		
white number	20		
white number	20		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
GLM	3	GLM	GLM
google mode	1	0 1 2	0
direct number	20		
direct number	20		
direct number	20		
Reserved	0		
Reserved	0		

Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
PIN	3	PIN	PIN
auto unlock PIN	1	0 1	1
PIN	4-8	'0'-'9'	
PIN checking	1	0 1	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
DIS	3	DIS	DIS
Input ID	1	1	1
Enable	1	0 1	0
Debounce time	<=2	1-20 (×10ms)	5
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
DOG	3	DOG	DOG
Mode	1	0 1 2	0
Ignition Frequency	<=3	10-120	60
Interval	<=2	1-30 days	30
Time	4	HHMM	0200
Reserved	0		
Report Before Reboot	1	0 1	1
Input ID	1	0 1	0
Unit	1	0 1	0
Gsm interval	4	5-1440	60
Pdp interval	4	5-1440	60
Reserved	0		
Reserved	3		
Reserved	1		
Reserved	5		
Reserved	5		
Reserved	<=8		
SFM	3	SFM	SFM
On Off enable	1	0 1	0

Off Time	5	0 – 300min	30
On Time	5	0 – 300min	10
SF Alt	<=8	(-)xxxxx.x m	1000
SF Speed	<=5	0.0 – 999.9km/h	200
Reserved	0		
Reserved	0		
NTS	3	NTS	NTS
enable	1	0 1	0
Rssi threshold	3	0 – 35	30
Interval	3	0 – 300min	10
Oper1	10		
Oper2	10		
Oper3	10		
Gsm interval	10	0 – 300min	
Reserved	0		
OWH	3	OWH	OWH
Mode	1	0 1 2 3	0
Day of Work	<=2	0 – 7F	1F
Working Hours Start1	4	HHMM	0900
Working Hours End1	4	HHMM	1200
Working Hours Start2	4	HHMM	1300
Working Hours End2	4	HHMM	1800
Reserved	0		
Reserved	0		
Digital Input ID	1	0 1	0
Output ID	1	0 – 1	0
Output Status	1	0 1	
Duration	<=3	0 – 255(×100ms)	0
Toggle Times	<=3	0 – 255	0
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ No matter what report mode is set, **+RESP:GTALL** is only reported through GPRS. If the current report mode is forcing on SMS, **+RESP:GTALL** will be reported via TCP short connection.

- **+RESP:GTCID:** The report for real time operation CID

Example:

+RESP:GTCID,02010B,135790246811220,,898600810906F8048812,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
ICCID	20		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- **+RESP:GTCSQ:** The report for real time operation CSQ

Example:

+RESP:GTCSQ,02010B,135790246811220,,16,0,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
CSQ RSSI	<=2	0 – 31 99	
CSQ BER	<=2	0 – 7 99	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- **+RESP:GTVR:** The report for real time operation VER

Example:

+RESP:GTVR,02010B,135790246811220,,GL200,0100,0101,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Device type	10	'0' – '9', 'a' – 'z', 'A' – 'Z'	GL200
Firmware version	4	0000 – FFFF	
Hardware version	4	0000 – FFFF	
Send time	14	YYYYMMDDHHMMSS	

Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <Device type>: A string represents the type of the device.
- ✧ <Firmware version>: The firmware version. The first two characters point out the main version and the last two characters point out the subsidiary version. For example: 010A means the version 1.10
- ✧ <Hardware version>: The hardware version. The first two characters point out the main version and the last two characters point out the subsidiary version. For example: 010A means the version 1.10

- **+RESP:GTBAT:** The report for real time operation BAT

Example: +RESP:GTBAT,02010B,135790246811220,,0,,,4.10,0,1,20100214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
External power supply	1	0 1	
Reserved	0		
battery percentage	3	0-100	
Battery voltage	<=4	0.0 – 4.50V	
Charging	1	0 1	
LED on	1	0 1	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ <Device type>: A string represents the type of the device.

- **+RESP:GTTMZ:** The report for real time operation TMZ

Example: +RESP:GTTMZ,02010B,135790246811220,-0330,0,20100214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Time zone offset	5	± HHMM	

Daylight saving	1	0 1	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTGSV:** The report for GPS level

Example:

+RESP:GTGSV,02010B,359464036001111,,3,17,11,30,24,31,30,32,28,32,29,12,0,14,17,16,18,20,0,22,24,24,0,25,0,20120305101643,000F\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
GPS level	1	0 1 2 3	
Jamming indicator	1	0-255	
SV count	2	0-12	
Sv_id	2	0-32	
Sv_power	2	0-55	
Sv_id	2	0-32	
Sv_power	2	0-55	
.....			
Sv_id	2	0-32	
Sv_power	2	0-55	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ *<GPS level>*: Four levels:

- 0: Can not fix
- 1: Hard to fix
- 2: A little hard fix
- 3: Easy to fix

✧ *<Jamming indicator>*: Scaled (0 = no CW jamming, 255=strong CW jamming)

✧ *<SV count>*: Count of satellites the GPS found.

✧ *<Sv id>*: Satellite id

✧ *<SV power>*: Satellite power

3.3.4. Event Report

The following event reports are triggered when certain event occurs.

- +RESP:GTPNA: Power on report
- +RESP:GTPFA: Power off report
- +RESP:GTEPN: The report for connecting external power supply
- +RESP:GTEPF: The report for disconnecting external power supply
- +RESP:GTBPL: Battery low report
- +RESP:GTBTC: Start charging report
- +RESP:GTSTC: Stop charging report.
- +RESP:GTSTT: Device motion state indication
- +RESP:GTANT: GPS antenna status indication
- +RESP:GTPDP: GPRS PDP connection report
- +RESP:GTSWG: Switch on or off Geo-Fence 0 via function key
- +RESP:GTIGN: Ignition on report
- +RESP:GTIGF: Ignition off report
- +RESP:GTGSM: The report for the information of the service cell and the neighbor cells.
- +RESP: GTROF: The report for deactivating its' GSM communication module.
- +RESP: GTRON: The report for activating its' GSM communication module.

In +RESP:GTEPN, +RESP:GTEPF, +RESP:GTBTC, +RESP:GTSTC, +RESP:GTBPL, +RESP:GTSTT, +RESP:GTANT and +RESP:GTSWG event reports, the last known GPS information and the current GSM network information are involved.

➤ +RESP:GTPNA:

Example:			
+RESP:GTPNA,02010B,135790246811220,,20100214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ +RESP:GTPFA:

Example:			
+RESP:GTPFA,02010B,135790246811220,,20100214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	

Unique ID	15	IMEI	
Device name	20		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTEPN:****Example:**

+RESP:GTEPN,02010B,135790246811220,,0,4,3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ *<Last longitude>*: The longitude of the last position. The format is “(-)xxx.xxxxxx” and the value range is from “-180.000000” to “180.000000”. The unit is degree. West longitude is defined as negative starting with minus “-” and east longitude is defined as positive without “+”.

✧ *<Last latitude>*: The latitude of the last position. The format is “(-)xx.xxxxxx” and the value range is from “-90.000000” to “90.000000”. The unit is degree. South Latitude is defined as negative starting with minus “-” and north Latitude is defined as positive without “+”.

➤ **+RESP:GTEPF:****Example:**

+RESP:GTEPF,02010B,135790246811220,0,,4,3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTBPL:****Example:**

+RESP:GTBPL,02010B,135790246811220,,3.53,0,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Battery voltage	<=4	0.0 – 4.50V	
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	

Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTBTC:****Example:**

+RESP:GTBTC,02010B,135790246811220,,0,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTSTC:****Example:**

+RESP:GTSTC,02010B,135790246811220,,0,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Reserved	0		
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	

Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTSTT:****Example:**

+RESP:GTSTT,02010B,135790246811220,,41,0,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
State	2	21 22 41 42	
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTANT:****Example:**

+RESP:GTANT,02010B,135790246811220,,0,0,0,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
GPS antenna type	1	0 1	
GPS antenna state	1	0	
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTPDP:**

Example:

+RESP:GTPDP,02010B,135790246811220,,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

➤ **+RESP:GTSWG:**

Example:

+RESP:GTSWG,02010B,135790246811220,,1,0,2.1,0,27.1,121.390717,31.164424,20100901073917,0460,0000,1878,0873,00,20100901154653,0015\$

Parameter	Length (byte)	Range/Format	Default
-----------	---------------	--------------	---------

Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Geo active	1	0 1	
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ <Geo active>: A numeric to indicate to activate or deactivate Geo-Fence 0 by the long press of the function key.

0: deactivate Geo-Fence 0

1: activate Geo-Fence 0

➤ **+RESP:GTIGN:**

Example:

+RESP:GTIGN,02010B,135790246811220,,1200,0,4,3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20090214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Duration of Ignition Off	<=6	0 – 999999 sec	
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	

GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ <Duration of Ignition Off>: Duration since last time the ignition is off. If greater than 999999 seconds, report as 999999 seconds.

➤ **+RESP:GTIGF:**

Example: +RESP:GTIGF,02010B,135790246811220,,1200,0,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20090214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Duration of Ignition On	<=6	0 – 999999 sec	
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ <Duration of Ignition On>: Duration since last time the ignition is on. If greater than 999999 seconds, report as 999999 seconds.

➤ +RESP:GTGSM

Example: +RESP:GTGSM,02010B,011874000103767,FRI,0460,0000,1878,0871,20,,0460,0000,1878,0152,16,,,,,,,,,,,,,,,,,,,,,0460,0000,1878,0873,57,00,20100712071540,0008\$			
Parameter	Length(byte)	Range	Default
protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
unique id	15	IMEI	
fix type	3	SOS RTL LBC FRI GSM	
mcc1	4	0XXX	
mnc1	4	0XXX	
lac1	4		
cellid1	4		
rxlevel1	2	0-63	
reserved1	0		
mcc2	4	0XXX	
mnc2	4	0XXX	
lac2	4		
cellid2	4		
rxlevel2	2	0-63	
reserved2	0		
mcc3	4	0XXX	
mnc3	4	0XXX	
lac3	4		
cellid3	4		
rxlevel3	2	0-63	
reserved3	0		
mcc4	4	0XXX	
mnc4	4	0XXX	
lac4	4		
cellid4	4		
rxlevel4	2	0-63	
reserved4	0		
mcc5	4	0XXX	
mnc5	4	0XXX	
lac5	4		
cellid5	4		
rxlevel5	2	0-63	
reserved5	0		

mcc6	4	0XXX	
mnc6	4	0XXX	
lac6	4		
cellid6	4		
rxlevel6	2	0-63	
reserved6	0		
mcc	4	0XXX	
mnc	4	0XXX	
lac	4		
cellid	4		
rxlevel	2	0-63	
ta	2		
send time	14	YYYYMMDDHHMMSS	
count num	4		
Tail character	1	\$	\$

- ✧ *<fix type>* : A string to indicate what kind of GPS fixing this cell information is for.
 - "SOS" This cell information is for SOS requirement.
 - "RTL" This cell information is for RTL requirement.
 - "LBC" This cell information is for LBC requirement.
 - "FRI" This cell information is for FRI requirement.
- ✧ *<mcci>* : MCC of the neighbor cell *i* (*i* is the index of the neighbor cell).
- ✧ *<mnci>* : MNC of the neighbor cell *i*.
- ✧ *<laci>* : LAC in hex format of the neighbor cell *i*.
- ✧ *<cellidi>* : Cell ID in hex format of the neighbor cell *i*.
- ✧ *<rxleveli>* : The signal strength of the neighbor cell *i*. This parameter is a 6-bit coded in 1 dB steps:
 - 0: -110 dBm
 - 1 to 62: -109 to -48 dBm
 - 63: -47 dBm
- ✧ *<reservedi>* : The reserved filed for the neighbor cell *i*.
- ✧ *<mcc>* : MCC of the service cell.
- ✧ *<mnc>* : MNC of the service cell.
- ✧ *<lac>* : LAC in hex format of the service cell.
- ✧ *<cellid>* : Cell ID in hex format of the service cell.
- ✧ *<rxlevel>* : The signal strength of the service cell.

Note:

1. It probably includes only several neighbor cells' (even no neighbor cell) information. If some neighbor cell wasn't find, all the fields of the neighbor cell will be empty.
2. "ffff" in the field of *<lac(i)>*, *<cellid(i)>* means the terminal doesn't know the value.
3. This message can not be sent via SMS.

➤ **+RESP:GTROF:****Example:**

+RESP:GTROF,02010B,135790246811220,,0,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	10		
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

<Last longitude>: The longitude of the last position. The format is “(-)xxx.xxxxxx” and the value range is from “-180.000000” to “180.000000”. The unit is degree. West longitude is defined as negative starting with minus “-” and east longitude is defined as positive without “+”.

<Last latitude>: The latitude of the last position. The format is “(-)xx.xxxxxx” and the value range is from “-90.000000” to “90.000000”. The unit is degree. South Latitude is defined as negative starting with minus “-” and north Latitude is defined as positive without “+”.

➤ **+RESP:GTRON:****Example:**

+RESP:GTRON,02010B,135790246811220,0,,4.3,92,70.0,121.354335,31.222073,20090214013254,0460,0000,18d8,6141,00,20100214093254,11F0\$

Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXFFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	10		
GPS accuracy	1	0	
Speed	<=5	0.0 – 999.9km/h	
Azimuth	<=3	0 – 359	
Altitude	<=8	± XXXXX.X m	
Last longitude	<=11	± XXX.XXXXXX	
Last latitude	<=10	± XX.XXXXXX	
GPS UTC time	14	YYYYMMDDHHMMSS	

MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Odo mileage	9	0.0 – 4294967.0Km	
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

3.3.5. Transparent Data Transmission

GL200 supports to transfer data between the backend server and the peripheral device connected to the device via UART. GL200 supports bi-directional data transmission.

a) Transfer data from the peripheral device to the backend server

1. If the peripheral device can execute **AT+GTDAT** command as defined in the chapter 3.2.18, it can transfer data via this command. The peripheral device can send command **AT+GTDAT** with the data to the serial port. According to the *<command type>* of **AT+GTDAT**, The device wrap the corresponding data format with **+RESP:GTDAT** message either in short format or in long format and send it to the backend server.

b) Transfer data from the backend server to the peripheral device

If the backend server needs to send data to the peripheral device, it can send command **AT+GTDAT** with the data to GL200 and GL200 will pick out the data and send it to the serial port. Thus the peripheral device can get the data from the serial port.

➤ +RESP:GTDAT(Short Format)

Example:

+RESP:GTDAT,02010B,135790246811220,GL300,config command to the CAN bus device,20121117112247,032D\$

Parameter	Length(byte)	Range	Default
protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
unique id	15	IMEI	
Device name	20		
data	<=100	ASCII Code	
send time	14	YYYYMMDDHHMMSS	
count num	4		
Tail character	1	\$	\$

✧ *<data>*: The data to be transferred when you execute the command “AT+GTDAT”,It should be printable ASCII string.

➤ +RESP:GTDAT (Long Format)

Example:

+RESP:GTDAT,02010B,135790246811220,,3,,,1645026150,0,0.5,0,29.4,121.390923,31.1642 95,20111222022935,0460,0000,1806,2142,00,,,,,20111222022938,001A\$

Parameter	Length(byte)	Range/Format	Default
Protocol Version	6	XX0000 – XXXFFF, X ∈ {'A' – 'Z','0' – '9'}	
Unique ID	15	IMEI	
Device Name	<=20	'0' – '9' 'a' – 'z' 'A' – 'Z' '-' '_'	
Reserved	0		

Reserved	0		
Reserved	0		
Data to the Backend Server	<=100	ASCII Code	
GPS Accuracy	<=2	0	0, Last known
Speed	<=5	0.0 – 999.9 km /h	
Azimuth	<=3	0 – 359	
Altitude	<=8	(-)xxxxx.x m	
Longitude	<=11	(-)xxx.xxxxxx	
Latitude	<=10	(-)xx.xxxxxx	
GPS UTC Time	14	YYYYMMDDHHMMSS	
MCC	4	0XXX	
MNC	4	0XXX	
LAC	4	XXXX	
Cell ID	4	XXXX	
Reserved	2	00	00
Reserved	0		
Reserved	0		
Reserved	0		
Reserved	0		
Send Time	14	YYYYMMDDHHMMSS	
Count Number	4	0000 – FFFF	
Tail Character	1	\$	\$

3.3.6. Buffer Report

If BUFFER function is enabled, the terminal will save the message into the BUFFER in the following circumstances.

- ✧ No GSM signal.
- ✧ Failed to activate GPRS context for the TCP or UDP connection.
- ✧ Failed to establish the TCP connection with the backend server.

These messages will be sent to the backend server after the message can be sent to the backend server. The device with SST flash (the firmware version end with "_SST") can save up to 90 messages if the length of each buffered message is not greater than 160. The device with NMX flash (the firmware version end with "_NMX") can save up to 3000 messages at most.

- ✧ Only **+RESP** messages can be buffered except **+RESP:GTALL**
- ✧ In the buffer report, the original header string "**+RESP**" is replaced by "**+BUFF**" while keeps the other content untouched including the original sending time and count number.
- ✧ Buffered messages will be sent only via GPRS by TCP or UDP protocol. They cannot be sent via SMS. If the current report mode is forcing on SMS, the buffered messages will be sent via TCP short connection.
- ✧ The buffered messages will be sent after the other normal messages sending if *<Buffer Mode>* in **AT+GTSRI** is set to 1.
- ✧ The buffered messages will be sent before the other normal messages sending if *<Buffer Mode>* in **AT+GTSRI** is set to 2. The SOS message has the highest priority and is sent before the buffered messages.

Example:

The following is an example of the buffered message:

```
+BUFF:GTFRI,02010B,135790246811220,,0,0,1,1,4,3,92,70,0,121.354335,31.222073,20090214
013254,0460,0000,18d8,6141,00,,20090214093254,11F0$
```

3.3.7. Report Google Maps hyperlink

According to the setting of the command **AT+GTGLM** and the configuration of location by call, the device can send a SMS with Google Maps hyperlink to a mobile phone.

If location by call is set to 1, GL200 will sent its current position to the incoming call via SMS with Google Maps hyperlink if the incoming call is a direct number (Please refer to *<direct number list>* in the chapter 3.2.13) or a white call (Please refer to *<white number list>* in the chapter 3.2.12).

If the *<google link mode>* was set as 1 in the command **AT+GTGLM**, GL200 will send a SMS with Google Maps hyperlink to the direct phone numbers after the message **+RESP:GTSOS** and **+RESP:GTGEO**.

➤ Google Maps hyperlink

Example:**GL200 SOS:**

<http://maps.google.com/maps?q=31.222073,121.354335+%28GL200%29>

F1 D2009/01/01T00:00:00 B74%

Parameter	Length(byte)	Range/Format	Default
Sms header	<=30		
Google Maps hyperlink	<=77		
GPS fix	2	F1 F0	
GPS UTC time	20	DYYYY/MM/DDTHH :MM:SS	
battery level	<=5	B1-100%	

- ✧ <Sms header>: A string that includes the terminal name and GPS fix type ("SOS", "IN GEO-i", "OUT GEO-i", "LBC").
- ✧ <Google Maps hyperlink>: A string of a google map hyperlink.

3.4. Heartbeat

Heartbeat is used to maintain the contact between the device and the backend server if communicating via GPRS. The heartbeat package is sent to the backend server at the interval defined by *<Heartbeat interval>* in **AT+GTQSS** or **AT+GTSRI** command.

➤ **+ACK:GTHBD:**

Example:			
+ACK:GTHBD,02010B,135790246811220,,20100214093254,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Unique ID	15	IMEI	
Device name	20		
Send time	14	YYYYMMDDHHMMSS	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

Whenever the backend server receives a heartbeat package, it should reply an acknowledgement to the device.

➤ **+SACK:GTHBD:**

Example:			
+SACK:GTHBD,02010B,11F0\$			
Parameter	Length (byte)	Range/Format	Default
Protocol version	6	XX0000 – XXXFFF, X ∈ {'A'-'Z','0'-'9'}	
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

✧ *<Count number>*: The backend server uses the *<Count number>* extracted from the heartbeat package from the device as the *<Count number>* in the server acknowledgement of the heartbeat.

3.5. Sever Acknowledgement

If server acknowledgement is enabled by AT+GTQSS or AT+GTSRI command, the backend server should reply to the device whenever it receives a message from the device.

➤ **+SACK:**

Example: +SACK:11F0\$			
Parameter	Length (byte)	Range/Format	Default
Count number	4	0000 – FFFF	
Tail character	1	\$	\$

- ✧ *<Count number>*: The backend server uses the *<Count number>* extracted from the received message as the *<Count number>* in the server acknowledgement.

Appendix: Message Index

✧ Command and ACK

AT+GTQSS

+ACK:GTQSS

AT+GTBSI

+ACK:GTBSI

AT+GTSRI

+ACK:GTSRI

AT+GTCFG

+ACK:GTCFG

AT+GTNMD

+ACK:GTNMD

AT+GTTMA

+ACK:GTTMA

AT+GTFRI

+ACK:GTFRI

AT+GTGEO

+ACK:GTGEO

AT+GTSPD

+ACK:GTSPD

AT+GTFKS

+ACK:GTFKS

AT+GTRTO

+ACK:GTRTO

AT+GTWLT

+ACK:GTWLT

AT+GTGLM

+ACK:GTGLM

AT+GTPIN

+ACK:GTPIN

AT+GTOUT

+ACK:GTOUT

AT+GTDIS

+ACK:GTDIS

AT+GTDOG

+ACK:GTDOG

AT+GTSFM

+ACK:GTSFM

AT+GTDAT

+ACK:GTDAT

AT+GTNTS

+ACK:GTNTS

AT+GTOWH

+ACK:GTOWH

AT+GTCMD

+ACK:GTCMD

AT+GTUDF

+ACK:GTUDF

✧ **Position Related Report**

+RESP:GTFRI

+RESP:GTGEO

+RESP:GTSPD

+RESP:GTSOS

+RESP:GTRTL

+RESP:GTLBC

+RESP:GTPNL

+RESP:GTNMR

+RESP:GTGCR

+RESP:GTDOG

+RESP:GTIGL

✧ **Device Information Report**

+RESP:GTINF

✧ **Report for Querying**

+RESP:GTGPS

+RESP:GTALL

+RESP:GTCID

+RESP:GTCSQ

+RESP:GTVER

+RESP:GTBAT

+RESP:GTTMZ

✧ **Event Report**

+RESP:GTPNA

+RESP:GTPFA

+RESP:GTEPN

+RESP:GTEPF

+RESP:GTBTC

+RESP:GTSTC

+RESP:GTBPL

+RESP:GTSTT

+RESP:GTANT

+RESP:GTPDP

+RESP:GTSWG

+RESP:GTIGN

+RESP:GTIGF

+RESP:GTGSM

+RESP:GTROF

+RESP:GTRON

✧ **Heartbeat**

+ACK:GTHBD

+SACK:GTHBD

✧ **Server Acknowledgement**

+SACK